



Monoblock pumps SM (GZA)

Stainless steel centrifugal pumps AISI 304, AISI 316











Characteristic

Monoblock centrifugal pumps SM (GZA) are designed for use in heating systems, cold and hot water supply, air conditioning, as well as for other industrial applications.

- maximum working pressure 10 bar,
- head 71 m,
- capacity 72 m³ /h,
- maximum temperature of the pumped liquid 120°C
- pump housing and impeller material: stainless steel AISI 304, AISI 316.

Model (GB5662)	Model (DIN24255)	Power		Q	L/min m ³ /h	0	150	200	300	333	400	600	700	900	200	1900	2100	2200	2300
		KW	HP			0	9	12	18	20	24	36	42	54	72	114	126	132	138
50-32-160/2.2	50-32-160/2.2	2.2	3.0	H(m)		37	34	32	27	25									
50-32-160/3.0	50-32-160/3.0	3.0	4.0			44	40	37,5	31	28									
50-32-200/4.0	50-32-200/4.0	4.0	5.5			55	52	49,5	43,5	40,5	37								
50-32-200/5.5	50-32-200/5.5	5.5	7.5			70,5	67,5	65	58,5	55	51								
65-50-125/2.2	65-40-125/2.2	2.2	3.0								17,5	14,9	13,4	10,7					
65-50-125/3.0	65-40-125/3.0	3.0	4.0								20,5	18,4	17	14,4	8				
65-50-160/4.0	65-40-160/4.0	4.0	5.5								26	24	22,5	20,5	14				
65-50-160/5.5	65-40-160/5.5	5.5	7.5								31	28,5	27	24,5	18				
65-40-200/7.5	65-40-200/7.5	7.5	10								38,5	36	35	32,5	26				
65-40-200/9.2	65-40-200/9.2	9.2	12.5									49	47,5	44,5	34				
80-65-125/4.0	65-50-125/4.0	4.0	5.5										19	17,3	13,5	6,3			
80-65-125/5.5	65-50-125/5.5	5.5	7.5										24	22,2	18,5	10,8	8		
80-65-160/7.5	65-50-160/7.5	7.5	10										29,5	27,8	24	16,1	13,4	12	
80-65-160/9.2	65-50-160/9.2	9.2	12.5										34,5	32,8	29	21,1	18,3	16,8	
80-50-200/11	65-50-200/11	11	15										38,5	37,1	33,5	25,8	23	21,5	20
80-50-200/15	65-50-200/15	15	20										45,5	44	40,5	32,6	29,6	28	26,5

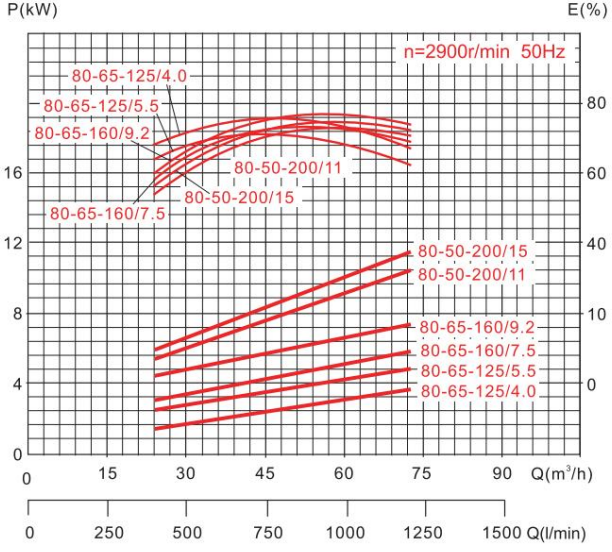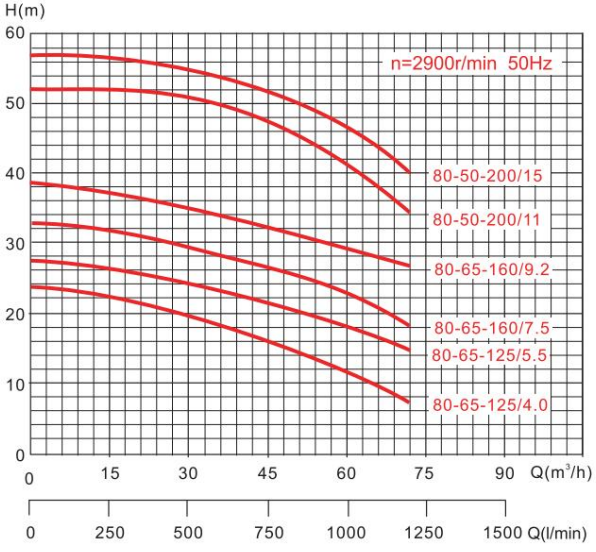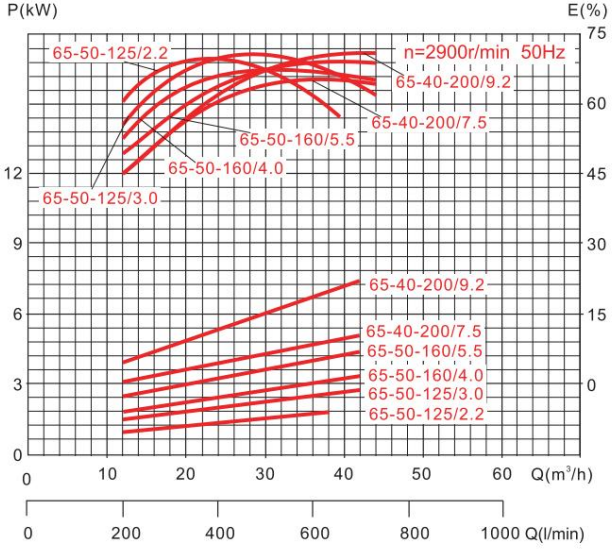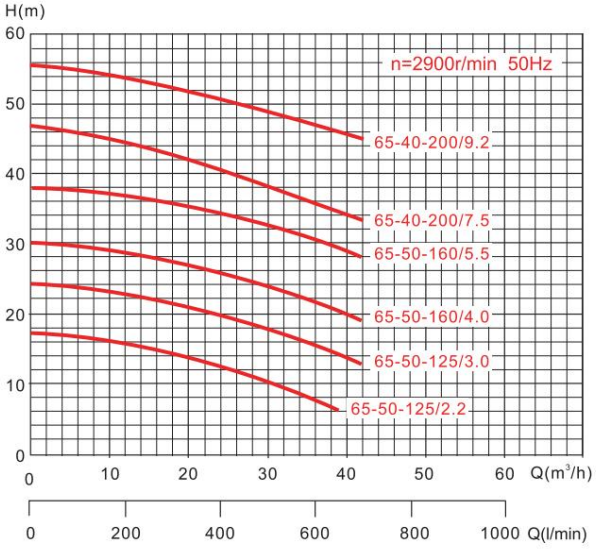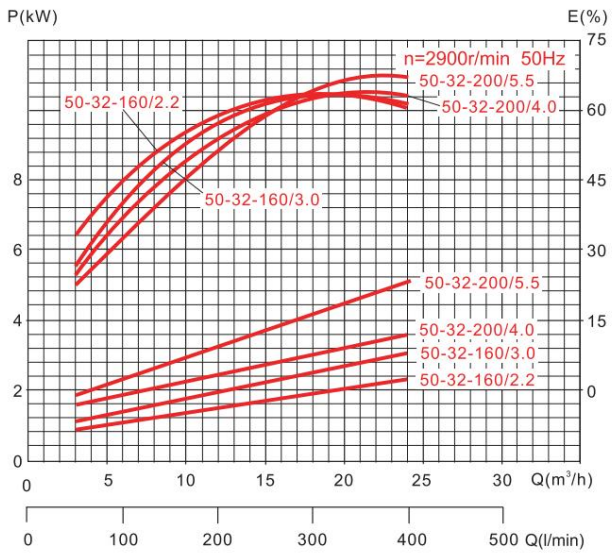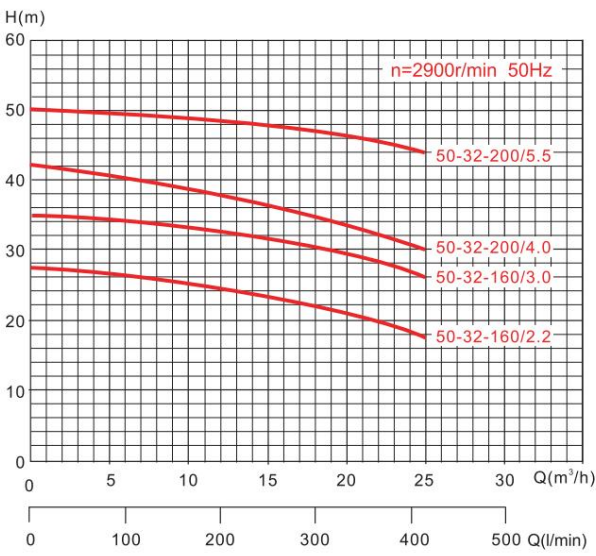

dimensions

