

For a Sustainable Future



yüzyük[®]
Irrigation Systems





Sprinklers, Connections Stands and Parts

Product Code		
YZK001 - BSP	Yuzuak JET30S Nozzles : 10mm -12mm -14mm -16mm -18mm Body Angle 28° Inlet Size 1,5" Female	
YZK002 - NPT		
YZK003 - BSP	Yuzuak JET35 Standart Nozzles : 10mm-12mm-14mm-16mm-18mm Body Angle 24° Inlet Size 1,5" Female	
YZK004 - NPT		
YZK005 - BSP	Yuzuak JET40 Standart Nozzles : 10mm - 12mm - 14mm - 16mm 18mm - 20mm-22mm Body Angle 25° Inlet Size 2" Female	
YZK006 - NPT		
YZK007 - BSP	Yuzuak JET50 Standart Nozzles : 14mm-16mm-18mm-20mm-22mm-24mm Body Angle 25° Inlet Size 2" Female	
YZK008 - NPT		
YZK009 - BSP	Yuzuak JET55 Standart Nozzles : 20mm- 22mm- 24mm- 26mm- 28mm Body Angle 25° Inlet Size 2,5 " Female With Qucik Coupling	
YZK010 - NPT		
YZK011	Yuzuak JET65 Standart Nozzles : 24mm- 26mm - 28mm - 30mm -32mm Body Angle 24° Inlet Size : 78mm x 130 mm Flange Connection	
YZK012	Yuzuak JET70 Adjustable Speed Control Nozzle Standart Nozzles : 28mm - 30mm - 32mm - 34mm Body Angle 23° Inlet Size : 78 X 145 Flange Connection	

Sprinklers, Connections Stands and Parts

Product Code		
YZK015 - BSP	Yuzuak JET35T Special Non Clogging Nozzles for Waste Water, with Standart Nozzles,additional Rubber Nozzles are extra price Dirty Water Nozzles :12mm -14mm- 16mm- 18mm Standart Nozzles :10mm-12mm-14mm-16mm-18mm Body Angle 25° Inlet Size 2 " Female	
YZK016 - NPT		
YZK017 - BSP	Yuzuak JET50T Special Non Clogging Nozzles for Waste Water,with Normal Nozzles, additional Rubber Nozzles are extra price Dirty Water Nozzles:14mm-16mm-18mm-20mm-22mm- 24mm Standart Nozzles : 14mm -16mm -18mm -20mm- 22mm Body Angle 25° Inlet Size 2 " Female	
YZK018 - NPT		
YZK033	Yuzuak JET65 T Special Non Clogging Nozzles for Waste Water ,with Normal Nozzles Dirty Water Nozzles : 20mm- 22mm - 24mm - 26mm -28mm Body Angle 24° Inlet Size : 78mm x 130 mm Flange Connection	
YZK019 - BSP	Yuzuak TURFJET (Small Turbine Drive Raingun for Horse Arenas and Turf Irrigation ,or Synthetic Turf Cooling) Nozzles : 12mm- 14mm -16mm - 18mm - 20mm - 22mm Body Angle 25° Inlet Size 2 " Female	
YZK020 - NPT		
YZK021 - BSP	Yuzuak PIVOTJET (Center Pivot End Gun or Windy Fields Raingun) Nozzles : 12mm - 14mm - 16mm - 18mm Body Angle 18° Inlet Size 1,5 "	
YZK022 - NPT		

Sprinklers, Connections Stands and Parts

Product Code		
YZK023 - BSP	Yuzuak DUSTJET Dust Control Raingun For Mining Nozzles : 14mm - 16mm - 18mm - 20mm - 22mm - 24mm Body Angle 43° Inlet Size 2 " Female	
YZK024 - NPT		
YZK025	Yuzuak Super DUSTJET Dust Control Raingun For Mining Nozzles : 22mm - 24mm - 26mm - 28mm - 30mm - 32mm Body Angle 43° Inlet Size : 78mm x 130 mm Flange Connection	
YZK026	Yuzuak Fire JET Short Barrel High Volume Raingun Standart Nozzles : 30mm-32mm-34mm-36mm Inlet Size : Flange Connection (145mm x 78mm) Working Pressure : 4 kg/cm² - 11 kg/cm²	
YZK027 - BSP	Yuzuak RED ATOM28 Brass and Stainless Steel Spindle and Part Circle Full Metal Body Standart Nozzles : 10mm - 12mm - 14mm Inlet Size : 1,5" Female	
YZK028 - NPT		
YZK029 - BSP	Yuzuak RED ATOM40 Brass and Stainless Steel Spindle and Part Circle Standart Aluminium Nozzles : 14mm - 16mm - 18mm Inlet Size : 2 " Female	
YZK030 - NPT		
YZK031 - BSP	Yuzuak Dustjet 27° Standart Nozzles : 14mm-16mm-18mm -20mm -22mm -24mm Body Angle 27° Inlet Size 2" Female	
YZK032 - NPT	Yuzuak Dustjet 27° Standart Nozzles : 14mm-16mm-18mm -20mm -22mm -24mm Body Angle 27° Inlet Size 2" Female	

Sprinklers, Connections Stands and Parts

Product Code		
YZK035	Yuzuak ATOM15 FC Full Circle 1" Impact Sprinkler Standart Nozzle : 6mm(orange) - 3,2mm(dark green) Body Angle 22° & 27° Inlet Size : 1" Female Female 1 Box 50 PCS	
YZK036	Yuzuak ATOM15 PC 1" Part or Full circle Impact Sprinkler Standart Nozzles : 5.5mm (White) Body Angle 23° Inlet Size : 1" Female Female 1 Box 50 PCS	
YZK037	Yuzuak ATOM15 LF Full Circle 1" Impact Sprinkler Standart Nozzle : 4,5 mm (Black) x 2,5mm (Turquoise) Body Angle 22° & 27° Inlet Size : 1" Female 1 Box 50 PCS	
YZK038	Yuzuak ATOM15 LF PC 1" Part or Full circle Impact Sprinkler Standart Nozzles : 4.5mm (Black) Body Angle 23° Inlet Size : 1" Female Female 1 Box 50 PCS	
YZK039	Yuzuak ATOM15 LA Full Circle 1" Impact Sprinkler , Undertree Irrigation Or Pivot Sprinklers Standart Nozzle :5.5mm(White) - 2,5 mm(turquoise) Body Angle 7° & 10° Inlet Size : 1" Female 1 Box 50 PCS	
YZK040	Yuzuak ATOM15 LA LF Full Circle 1" Impact Sprinkler , Undertree Irrigation Or Pivot Sprinklers Standart Nozzle :4.5mm(Black) - 2,5 mm(turquoise) Body Angle 7° & 10° Inlet Size : 1" Female 1 Box 50 PCS	

Sprinklers, Connections Stands and Parts

Product Code	
YZK054- BSP	Yuzuak ATOM22 ECO FC Plastic Spindle and Full Circle Standart Nozzles : 6mm - 8mm - 10mm Inlet Size : 1" Female 
YZK055 - NPT	
YZK056 - BSP	Yuzuak ATOM22 Brass Spindle and Part Circle Standart Nozzles : 6mm - 8mm - 10mm Inlet Size : 1" Female 
YZK057 - NPT	
YZK058 - BSP	Yuzuak ATOM28 ECO Aluminium body and aluminium lower body Part Circle Standart Nozzles : 10mm - 12mm - 14mm Inlet Size : 1,5" Female 
YZK059 - NPT	
YZK060 -BSP	Yuzuak ATOM28 ECO FC Aluminium body and aluminium lower body Full Circle Standart Nozzles : 10mm - 12mm - 14mm Inlet Size : 1,5" Female 
YZK061 -NPT	
YZK062 - BSP	Yuzuak B30 ECO FC Aluminium and Stainless Steel Spindle and Full Circle Standart Nozzles : 8mm - 10mm-12mm Inlet Size : 1,5" Female 
YZK063 - NPT	

Sprinklers, Connections Stands and Parts

Product Code		
YZK070 - BSP	Yuzuak B30 Brass and Stainless Steel Spindle and Part or Full Circle Standart Nozzles : 8mm - 10mm-12mm-14mm Plastic Main Body Inlet Size : 1,5" Female	
YZK071 - NPT		
YZK072 - BSP	Yuzuak ATOM28 Brass and Stainless Steel Spindle and Part Circle Full Metal Body Standart Nozzles : 10mm - 12mm - 14mm Inlet Size : 1,5" Female	
YZK073 - NPT		
YZK074 - BSP	Yuzuak ATOM35 Brass and Stainless Steel Spindle and Part Circle Standart Aluminium Nozzles : 12mm -14mm -16mm - 18mm Inlet Size : 1,5" Female	
YZK075 - NPT		
YZK076 - BSP	Yuzuak ATOM40 Brass Spindle and Part Circle Standart Aluminium Nozzles : 14mm - 16mm - 18mm Inlet Size : 2" Female	
YZK077 - NPT		
YZK078 - BSP	Yuzuak ATOM42 FC High Performance Full Circle Impact Sprinkler Standart Nozzles : 14mm -16mm - 18mm - 20mm - 22mm Inlet Size : 2" Female	
YZK079 - NPT		

Sprinklers, Connections Stands and Parts

Sprinklers, Connections Stands and Parts		
Product Code		
YZK090 - BSP	Mini ECO 1" Connection Stand Water Line Pipe 1" Aluminium Pipe Height : 75 cm Maximum Work Pressure : 4 kg/cm2 (56 psi) Weight : 4 kg (Recommend For B30 and Atom Series with 1" Reduction)	
YZK091 - NPT		
YZK092 - BSP	PRO ECO 1,5" Connection Stand Water Line Pipe 1,5 " Pipe Height : 85 cm Maximum Work Pressure : 4 kg/cm2 (56 psi) Weight : 5 kg (Recommend For B30 and Atom Series)	
YZK093 - NPT		
YZK094 - BSP	3 Pod 2" Connection Stand With Quick Coupling Adjustable Legs Water Input : 2" Water Output :1,5 " Pipe Height : 85 cm Maximum Work Pressure : 5 kg/cm2 (70 psi) Weight : 11 kg	
YZK095 - NPT		
YZK096 - BSP	4 Pod 2" Connection Stand With Quick Coupling Adjustable Legs Water Input : 2" Water Output :2 " Pipe Height : 100 cm Maximum Work Pressure : 5 kg/cm2 (70 psi) Weight : 13 kg	
YZK097 - NPT		
YZK098 - BSP	4 Pod 2" Connection Stand Adjustable Legs Water Pipe Line : 2 " Pipe Height : 100 cm Maximum Work Pressure : 5 kg/cm2 (70 psi) Weight : 12 kg	
YZK099 - NPT		
YZK100 - BSP	4 Pod 2,5 " Connection Stand Adjustable Legs Water Pipe Line : 2,5 " Pipe Height : 75 cm Maximum Work Pressure : 5 kg/cm2 (70 psi) Weight : 14 kg	
YZK102 - BSP	4 Pod 3 " Connection Stand Adjustable Legs Water Pipe Line : 3 " Pipe Height : 75 cm Maximum Work Pressure : 5 kg/cm2 (70 psi) Weight : 18 kg	
YZK103-BSP	High PRO ECO 1,5" Connection Stand Water Line Pipe 1,5 " Pipe Height : 85 cm + 85 cm = 170cm (With Mansoon) Maximum Work Pressure : 3 kg/cm2 (56 psi) Weight : 9 kg (Recommend For B30 and Atom Series)	
YZK104-NPT		
YZK105-BSP	High 4 Pod 2" Connection Stand With Quick Coupling Adjustable Legs Water Input : 2" Water Output :2 " Pipe Height : 100 cm + 100cm = 200 cm (With Mansoon) Maximum Work Pressure : 4 kg/cm2 (70 psi) Weight : 19 kg	
YZK106-NPT		
Our connection stands are painted with powder paint as a standard. Optional powder paint on electro galvanized coating or powder paint varnish on electro galvanized coating are available.		

Sprinklers, Connections Stands and Parts

Product Code		
YZK112 - BSP	Wheeled Raingun Cart 1" Water Pipe Line : 1" Pipe Height : 60 cm Maximum Work Pressure : 5 kg/cm2 (70 psi) Weight : kg Recommend for 1 " Sprinklers	
YZK113 - NPT		
YZK114 - BSP	Wheeled Raingun Cart 1,5" Water Pipe Line : 1,5 " Pipe Height : 60 cm Maximum Work Pressure : 5 kg/cm2 (70 psi) Weight : 12 kg Recommend for 1,5" Sprinklers	
YZK115 - NPT		
YZK116 - BSP	Wheeled Raingun Cart With 2" Water Pipe Line : 2 " Pipe Height : 60 cm Maximum Work Pressure : 5 kg/cm2 (70 psi) Weight : 16 kg Recommend for 1,5" & 2" Rainguns	
YZK117 - NPT		
YZK118 - BSP	2" Raingun Chart With Hose Reel Reel Outside Diameter 70 cm Box Dimensions : 120cm X 80 cm X 40 cm Weight : 30 kg	
YZK119 - NPT		
YZK120 - BSP	2" Raingun Chart With Hose & Hose Reel + Raingun it's have 50meter 2" PVC Layflat Hose with Hose coupling and with Atom40 Raingun . List price include 2" 50meter pvc layflat hose Reel Outside Diameter 70 cm Box Dimensions : 120cm X 80 cm X 40 cm Weight : 75 kg	
YZK121 - NPT		
YZK122 - BSP	2" Riser Pipe With 2" Female QC Pipe Lenght : 100 cm and Male screw 2"	
YZK123 - NPT		
Our connection stands are painted with powder paint as a standard. Optional powder paint on electro galvanized coating or powder paint varnish on electro galvanized coating are available.		

Aluminium Air Release Valves

YZK062 - BSP	Yuzuak Air Release Valve 1" Male For working Up To 10 bar Pressure	
YZK063 - NPT		
YZK064 - BSP	Yuzuak Air Release Valve 2" Female For working Up To 10 bar Pressure	
YZK065 - NPT		

Sprinklers, Connections Stands and Parts

Product Code		
YZK132	Quick Coupling System For 1" Sprinkler Inlet male 1" X Output male 1" For BSP Connections, Male A Part Suitable For : Atom15 - Atom22	
YZK133	Quick Coupling System For 1" Sprinkler Inlet male 1" X Output male 1" For BSP Connections, Female B Part Suitable For : Atom15 - Atom22	
YZK134	Quick Coupling System For 1" Sprinkler Inlet male 1" X Output male 1" For BSP Connections, Male A Part Suitable For : Atom15 - Atom22	
YZK135	Quick Coupling System For 1" Sprinkler Inlet male 1" X Output male 1" For BSP Connections, Female B Part Suitable For : Atom15 - Atom22	
YZK136	Quick Coupling System For 1" Sprinkler With Stop Valve Inlet male 1" X Output male 1" For BSP Connections Male A Part Suitable For : Atom15 - Atom22	
YZK137	Quick Coupling System For 1" Sprinkler With Stop Valve Inlet male 1" X Output male 1" For BSP Connections Female B Part Suitable For : Atom15 - Atom22	
YZK138	Quick Coupling System For 1" Sprinkler With Stop Valve Inlet male 1" X Output male 1" For NPT Connections Male A Part Suitable For : Atom15 - Atom22	
YZK139	Quick Coupling System For 1" Sprinkler With Stop Valve Inlet male 1" X Output male 1" For NPT Connections Female B Part Suitable For : Atom15 - Atom22	
YZK140	Quick Coupling System For Sprinkler Inlet female 2" X Output male 1,5" For BSP Connections Includes Pressure Gauge Hole With Blind Plug Output Size : 2" - 1,5" (3 Clamps) Suitable For : Atom28 - B30- Atom35 - JET30 - JET35	
YZK141	Quick Coupling System For Sprinkler Inlet female 2" X Output male 1,5" For NPT Connections Includes Pressure Gauge Hole With Blind Plug Output Size : 2" - 1,5" (3 Clamps) Suitable For : Atom28 - B30- Atom35 - JET30 - JET35	
YZK142	Quick Coupling System For Sprinkler Inlet female 2" X Output male 2" For BSP Connections Includes Pressure Gauge Hole With Blind Plug Output Size : 2" - 2" (3 Clamps) Suitable For : Atom40 - Atom42- JET40-JET50-JET35T-JET50T-Turfjet- Dustjet - Pivotjet	
YZK143	Quick Coupling System For Sprinkler Inlet female 2" X Output male 2" For NPT Connections Includes Pressure Gauge Hole With Blind Plug Output Size : 2" - 2" (3 Clamps) Suitable For : Atom40-Atom42- JET40-JET50 - JET35T - JET50T - Turfjet - Dustjet - Pivotjet	
YZK144	Quick Coupling System For Sprinkler Inlet female 2,5" X Output male 2" For BSP Connections Includes Pressure Gauge Hole With Blind Plug Output Size : 2" Suitable For : Atom40 - Atom42- JET40 - JET50 - JET35T - JET50T- Turfjet - Dustjet - Pivotjet	
YZK145	Quick Coupling System For Sprinkler Inlet female 2,5" X Output male 2" For NPT Connections Includes Pressure Gauge Hole With Blind Plug Output Size : 2" Suitable For : Atom40 - Atom42- JET40 - JET50 - JET35T - JET50T - Turfjet - Dustjet	
YZK146	Quick Coupling System For Sprinkler Inlet female 2,5" X Output male 2,5" For BSP Connections Includes Pressure Gauge Hole With Blind Plug Output Size : 2,5" - 2,5" (3 Clamps) Suitable For JET65	
YZK147	Quick Coupling System For Sprinkler Inlet female 2,5" X Output male 2,5" For NPT Connections Aluminum Quick Coupling Max Pressure : 10 kg/cm2 (140 psi) Includes Pressure Gauge Hole With Blind Plug Output Size : 2,5" - 2,5" (4 Clamps) Suitable For : JET65	
YZK148	Quick Coupling System For Sprinkler Inlet female 3" X Output male 3" For BSP Connections Aluminum Quick Coupling Max Pressure : 10 kg/cm2 (140 psi) Includes Pressure Gauge Hole With Blind Plug Output Size : 3" - 3" (4 Clamps) Suitable For : JET70	
YZK149	Quick Coupling System For Sprinkler Inlet female 3" X Output male 3" For NPT Connections Aluminum Quick Coupling Max Pressure : 10 kg/cm2 (140 psi) Includes Pressure Gauge Hole With Blind Plug Output Size : 3" - 3" (4 Clamps) Suitable For : JET70	

Sprinklers, Connections Stands and Parts

Product Code		
YZK150 - BSP	Female QC - Ø60 For Sprinkler System 1,5" Male Screw	
YZK151 - NPT		
YZK152 - BSP	Female QC - Ø60 For Sprinkler System 2" Male Screw	
YZK153 - NPT		
YZK154 - BSP	Male QC - Ø60 For Sprinkler System 2" Female Screw	
YZK155 - NPT		
YZK156 -BSP	Male QC - Ø60 For Sprinkler System 2,5" Female Screw	
YZK157 - NPT		
YZK158 - BSP	Female QC - Ø75 For Sprinkler System 2,5" male Screw	
YZK159 - NPT		
YZK160 - BSP	Male QC - Ø75 For Sprinkler System 2,5 " Female Screw	
YZK161 - NPT		
YZK162 - BSP	Female QC Ø90 For Sprinkler System 3" male Screw	
YZK163 - NPT		
YZK164 - BSP	Male QC - Ø90 For Sprinkler System 3 " Female Screw	
YZK165 - NPT		
YZK166 - BSP	78 X 130 Flange to 2,5" Female Connection (JET65 - JET65T - Super Dustjet)	
YZK167 - NPT		
YZK168 - BSP	78 X 145 Flange to 3" Female Connection it's Suitable for 3" Quick Coupling Connector	
YZK169 - NPT		

Irriforce Traveller Rainguns

Model Name	Product Photo	Technical Details
Irriforce Minix TD-120		Effective irrigation Length : 120 Meter Hose Length And Inside Diameter : 60 meter - 32mm Effective Spray Width : 28 Meter - 35 Meter Cable Length, diameter : 120 Meter - 3 mm Raingun Type : Atom22 , Flow Rate : 3,5 m3/h - 7 m3/h Recommended Working pressure : 3 bar-7 bar Recommended Hose inside Diameter : 32mm Travel Speed : 19meter/hour - 100meter/hour 20' Container Loading Capacity : 54 Weight (kg) : 50 kg Box Dimension : 92cm x 60cm x 55cm " These model Come without hose "
Irriforce Minix TD1250-120		Effective irrigation Length : 120 Meter Hose Length and Type : 60 meter - Drag Hose Hose Inside Diameter : 32mm Effective Spray Width : 28 Meter - 35 Meter Cable Length, diameter : 120 Meter - 3 mm Raingun Type : Atom22 Flow Rate : 3,5 m3/h - 7 m3/h Recommended Working pressure : 3 bar-7 bar Travel Speed : 19meter/hour - 100meter/hour Travel Speed Can be Adjustable by Nozzle&Pressure Manuel Hose Reel System 20' Container Loading Capacity : 54 Weight (kg) : 60 kg + 43 kg (Hose&hosereel) Box Dimension : 92cm x 60cm x 55cm
Irriforce Mini TD1500-140		Effective irrigation Length : 140 Meter Hose Length And Inside Diameter : 70 meter - 42mm Effective Spray Width : 32 Meter - 46 Meter Cable Length, diameter : 140 Meter - 4 mm Raingun Type : Standart Atom28 - Atom35 Optionally Flow Rate : 7m3/h - 19 m3/h Recommended Working pressure : 3.5 bar-8 bar Travel Speed : 7meter/hour - 70meter/hour Travel Speed Can be Adjustable by Manuel Valve Manuel Hose Reel System 20' Container Loading Capacity : 16 Weight (kg) : 160 kg (With Hose and Hosereel) Box Dimension : 155cm x 85cm x 105cm
Irriforce Midi Sport TD2500-200		Effective irrigation Length : 200 Meter Hose Length And Inside Diameter :100 meter - 65mm Effective Spray Width : 50 Meter - 75 Meter Cable Length, diameter : 200 Meter - 4 mm Raingun Type : JET50 Flow Rate : 18 m3/h - 45 m3/h Recommended Working pressure : 3,5 bar- 8 bar Travel Speed : 8meter/hour - 100 meter/hour Travel Speed Can be Adjustable by Mauel Valve Manuel Hose Reel System 20' Container Loading Capacity : 7 Box Dimension 1 : 154cm x 85 cm x 105cm (210 kg) Box Dimension 2 : 128cm X 95cm X 95cm (140kg)
Irriforce Midi TD2000-200		Effective irrigation Length : 200 Meter Hose Length And Inside Diameter : 100 meter - 51mm Effective Spray Width : 40 Meter - 65 Meter Cable Length, diameter : 200 Meter - 4 mm Raingun Type : JET40 Flow Rate : 12m3/h - 30 m3/h Recommended Working pressure : 3 bar-7.5 bar Travel Speed : 7meter/hour - 60 meter/hour Travel Speed Can be Adjustable by Mauel Valve Manuel Hose Reel System 20' Container Loading Capacity : 7 Box Dimension 1 : 154cm x 85 cm x 105cm (210 kg) Box Dimension 2 : 128cm X 95cm X 95cm (140kg)

Irriforce Traveller Rainguns

Model Name	Product Photo	Technical Details
Irriforce MICO TD2000- 200		Effective irrigation Length : 200 Meter Hose Length And Inside Diameter : 100meter-51mm Effective Spray Width : 40 Meter - 65 Meter Cable Length, diameter : 200 Meter - 4 mm Raingun Type : JET50 Flow Rate : 12m3/h - 30 m3/h Recommended Working pressure : 3 bar-7.5 bar Tractor Operated Hose rewind System Travel Speed : 7meter/hour - 60 meter/hour 20' Container Loading Capacity : 5 Weight (kg) : 450 kg Box Dimension : 220cm X 115 cm X 165 cm
Irriforce MICO TD2000- 300 Twin		Effective irrigation Length : 300 Meter Hose Length And Inside Diameter : 100+50 meter - 51mm Effective Spray Width : 40 Meter - 65 Meter Cable Length, diameter : 300 Meter - 4 mm Raingun Type : JET50 Flow Rate : 12m3/h - 30 m3/h Recommended Working pressure : 3 bar-7.5 bar Travel Speed : 7meter/hour - 50 meter/hour Tractor Operated Hose rewind System 20' Container Loading Capacity : 5 Weight (kg) : 500 kg Box Dimension : 220cm X 115 cm X 165 cm
Irriforce MICO TD2000- 300		Effective irrigation Length : 300 Meter Hose Length And Inside Diameter : 150 meter - 51mm Effective Spray Width : 40 Meter - 65 Meter Cable Length, diameter : 300 Meter - 4 mm Raingun Type : JET50 Flow Rate : 12m3/h - 30 m3/h Recommended Working pressure : 3 bar-7.5 bar Travel Speed : 7meter/hour - 50 meter/hour Tractor Operated Hose rewind System 20' Container Loading Capacity : 5 Weight (kg) : 500 kg Box Dimension : 220cm X 115 cm X 165 cm
Irriforce MICO TD2500- 200		Effective irrigation Length : 200 Meter Hose Length And Inside Diameter : 100 meter - 65mm Effective Spray Width : 50 Meter - 75 Meter Cable Length, diameter : 200 Meter - 4 mm Raingun Type : JET50 Flow Rate : 18m3/h - 45 m3/h Recommended Working pressure : 4 bar- 8 bar Travel Speed : 9meter/hour - 50 meter/hour Tractor Operated Hose rewind System 20' Container Loading Capacity : 5 Weight (kg) : 500 kg Box Dimension : 220cm X 115 cm X 165 cm
Irriforce MICO X TD2500-300		Effective irrigation Length : 300 Meter Hose Length And Inside Diameter : 150meter - 65mm Effective Spray Width : 51 Meter - 75 Meter Cable Length, diameter : 300 Meter - 6 mm Raingun Type : JET55 Flow Rate : 18m3/h - 45 m3/h Recommended Working pressure : 4 bar-8 bar Travel Speed : 10meter/hour - 60meter/hour 20' Container Loading Capacity : 4 Weight (kg) : 560 kg Box Dimension : 265 cm X 115 cm X 185 cm

Irriforce Traveller Rainguns


Model Name	Product Photo	Technical Details
Irriforce ECO TD2500-400		Effective irrigation Lenght : 400 Meter Hose Lenght And Inside Diameter : 200meter - 65mm Effective Spray Width : 40 Meter - 60 Meter Cable Lenght, diameter : 400 Meter - 6 mm Raingun Type : JET55 Flow Rate : 18m3/h - 45 m3/h Recommended Working pressure : 4 bar-8 bar Travel Speed : 10meter/hour - 70meter/hour PTO Air Compressor Standart For Hose Clean 20' Container Loading Capacity : 4 Weight (kg) : 790 kg Box Dimension : 265 cm X 115 cm X 185 cm
Irriforce ECO TD3000-200		Effective irrigation Lenght : 200 Meter Hose Lenght And Inside Diameter : 100meter - 76mm Effective Spray Width : 60 Meter - 90 Meter Cable Lenght, diameter : 200 Meter - 6 mm Raingun Type : JET55 Flow Rate : 28m3/h - 66 m3/h Recommended Working pressure : 4 bar-8 bar Travel Speed : 12meter/hour - 70 meter/hour 20' Container Loading Capacity : 4 Weight (kg) : 780 kg Box Dimension : 265 cm X 115 cm X 185 cm Optionaly PTO Air compressor + 600 USD
Irriforce ECO TD3000-300		Effective irrigation Lenght : 300 Meter Hose Lenght And Inside Diameter : 150meter - 76mm Effective Spray Width : 60 Meter - 90 Meter Cable Lenght, diameter : 300 Meter - 6 mm Raingun Type : JET55 Flow Rate : 28m3/h - 66 m3/h Recommended Working pressure : 4 bar-8 bar Travel Speed : 12meter/hour - 70meter/hour PTO Air Compressor Standart For Hose Clean 20' Container Loading Capacity : 4 Weight (kg) : 800 kg Box Dimension : 265 cm X 115 cm X 185 cm
Irriforce ECO TD3000-400		Effective irrigation Lenght : 400 Meter Hose Lenght And Inside Diameter : 200meter - 76mm Effective Spray Width : 60 Meter - 90 Meter Cable Lenght, diameter : 400 Meter - 6 mm Raingun Type : JET55 Flow Rate : 28m3/h - 66 m3/h Recommended Working pressure : 4 bar-8 bar Travel Speed : 12meter/hour - 70meter/hour PTO Air Compressor Standart For Hose Clean 20' Container Loading Capacity : 4 Weight (kg) : 850 kg Box Dimension : 265 cm X 115 cm X 185 cm



Irriforce Traveller Rainguns

Model Name	Product Photo	Technical Details
Irriforce Comfort TD3000-200		Effective irrigation Lenght : 200 Meter Hose Lenght And Inside Diameter : 100meter - 76mm Effective Spray Width : 60 Meter - 90 Meter Cable Lenght, diameter : 200 Meter - 6 mm Raingun Type : JET65 Flow Rate : 28m3/h - 66 m3/h Recommended Working pressure : 4 bar-8 bar Travel Speed : 10meter/hour - 90meter/hour 3 Speed Gearbox + Aircompressor 20' Container Loading Capacity : 4 Weight (kg) : 790 kg Box Dimension : 285 cm X 115 cm X 185 cm
Irriforce Comfort TD3000-300		Effective irrigation Lenght : 300 Meter Hose Lenght And Inside Diameter : 150meter - 76mm Effective Spray Width : 60 Meter - 90 Meter Cable Lenght, diameter : 300 Meter - 6 mm Raingun Type : JET65 Flow Rate : 28m3/h - 66 m3/h Recommended Working pressure : 4 bar-8,5 bar Travel Speed : 10meter/hour - 90meter/hour 3 Speed Gearbox + Air compressor 20' Container Loading Capacity : 4 Weight (kg) : 850 kg Box Dimension : 285 cm X 115 cm X 185 cm
Irriforce Comfort TD3000-400		Effective irrigation Lenght : 400 Meter Hose Lenght And Inside Diameter : 200meter - 76mm Effective Spray Width : 60 Meter - 90 Meter Cable Lenght, diameter : 400 Meter - 6 mm Raingun Type : JET65 Flow Rate : 28m3/h - 66 m3/h Recommended Working pressure : 4 bar-8,5 bar Travel Speed : 10meter/hour - 90meter/hour 3 Speed Gearbox + Air compressor 20' Container Loading Capacity : 4 Weight (kg) : 900 kg Box Dimension : 285 cm X 115 cm X 185 cm
Irriforce Ultra TD3000-400		Effective irrigation Lenght : 400 Meter Hose Lenght And Inside Diameter : 200meter - 76mm Effective Spray Width : 60 Meter - 90 Meter Cable Lenght, diameter : 400 Meter - 6 mm Raingun Type : JET65 Flow Rate : 28m3/h - 66 m3/h Recommended Working pressure : 4 bar-8 bar Travel Speed : 15meter/hour - 90meter/hour 3 Speed Gearbox + Air compressor 20' Container Loading Capacity : 1 40' Container Loading Capacity : 3 Weight (kg) : 1300 kg Box Dimension : 310 cm X 140 cm X 185 cm
Irriforce Ultra TD3500-400		Effective irrigation Lenght : 400 Meter Hose Lenght And Inside Diameter : 200meter - 90mm Effective Spray Width : 60 Meter - 100 Meter Cable Lenght, diameter : 400 Meter - 8 mm Raingun Type : JET65 Flow Rate : 28m3/h - 100 m3/h Recommended Working pressure : 4 bar-8 bar Travel Speed : 15meter/hour - 90meter/hour 3 Speed Gearbox + Air compressor 20' Container Loading Capacity : 1 40' Container Loading Capacity : 3 Weight (kg) : 1300 kg Box Dimension : 310 cm X 140 cm X 185 cm
Irriforce Ultra TD3500-500		Effective irrigation Lenght : 500 Meter Hose Lenght And Inside Diameter : 250meter - 90mm Effective Spray Width : 60 Meter - 100 Meter Cable Lenght, diameter : 500 Meter - 8 mm Raingun Type : JET65 Flow Rate : 28m3/h - 100 m3/h Recommended Working pressure : 4 bar-8 bar Travel Speed : 15meter/hour - 90meter/hour 3 Speed Gearbox + Air Compressor 20' Container Loading Capacity : 1 40' Container Loading Capacity : 3 Weight (kg) : 1350 kg Box Dimension : 310 cm X 140 cm X 185 cm

Irriforce Traveller Rainguns

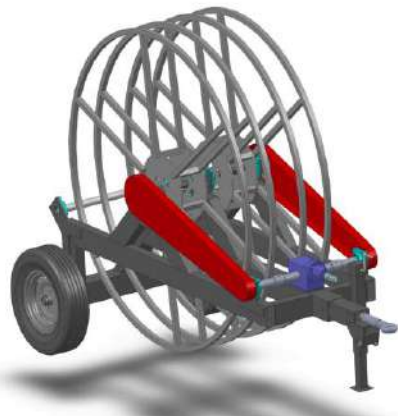Model Name	Product Photo	Technical Details
HR00 1		It's have Capacity for Maximum 70meter Hose lenght for 1,25" and 1.5" hose List price doesn't include hose Reel Outsie Diameter 70cm
HR00 2		It's have Capacity for Maximum 150meter Hose lenght for 2" and 2.5" hose List price doesn't include hose Reel Outsie Diameter 70cm
HR00 3		It's have Capacity for Each Reel 2,5"- 3" 50 meter Hose X 4 Roll , Total Reel Can be Collect 200meter Hose lenght for up to 3" hose List price doesn't include hose Reel Outsie Diameter 70cm Dimensions : 125cm X 95 cm X 95 cm Weight : 70 kg
HR00 4		It's have Capacity for Maximum 200meter Hose lenghts for 2,5" and 3" hose These model operated by PTO Gearbox List price doesn't include hose Reel Outsie Diameter 138cm Dimensions : 210cm X 115 cm X 185 cm Weight : 125 kg
HR00 5		It's have Capacity for Maximum 200meter Hose lenghts for 3" and 3,5" hose These model operated by PTO Gearbox it's have double hose reel Reels Outsie Diameter 180cm

Yuzuak Irrigation Systems
Low Cost , Easy to Install
Make your own Irrigation System Byself



Irrigation Systems

Product
Code

Make Your Own Irrigation System Byself

PVC1	Coupling For 60mm PVC Pipe - Ø63 Male (Black)		
PVC2	Coupling For 60mm PVC Pipe - Ø63 Female (Black)		
These Coupling Designed For PVC Pipes , PVC Pipe outside have to be 60mm , Couplings Should be attached to pvc pipes by using PVC Glue Maximum Working Pressure 6 kg / cm2			
PVC3	Coupling For 63mm PVC Pipe - Ø63 Male (Green)		
PVC4	Coupling For 63mm PVC Pipe - Ø63 Female (Green)		
These Coupling Designed For PVC Pipes , PVC Pipe outside have to be 63mm , Couplings Should be attached to pvc pipes by using PVC Glue Maximum Working Pressure 6 kg / cm2			
PVC5	Coupling For 75mm PVC Pipe - Ø75 Male (Blue)		
PVC6	Coupling For 75mm PVC Pipe - Ø75 Female (Blue)		
These Coupling Designed For PVC Pipes , PVC Pipe outside have to be 75mm , Couplings Should be attached to pvc pipes by using PVC Glue Maximum Working Pressure 6 kg / cm2			
PVC7	Coupling For 76mm PVC Pipe - Ø75 Male (Yellow)		
PVC8	Coupling For 76mm PVC Pipe - Ø75 Female (Yellow)		
These Coupling Designed For PVC Pipes , PVC Pipe outside have to be 76mm , Couplings Should be attached to pvc pipes by using PVC Glue Maximum Working Pressure 6 kg / cm2			
PVC9	Coupling For 89mm PVC Pipe - Ø90 Male (Turquoise)		
PVC10	Coupling For 89mm PVC Pipe - Ø90 Female (Turquoise)		
These Coupling Designed For PVC Pipes , PVC Pipe outside have to be 89mm , Couplings Should be attached to pvc pipes by using PVC Glue Maximum Working Pressure 6 kg / cm2			
PVC11	Coupling For 90mm PVC Pipe - Ø90 Male (Cream)		
PVC12	Coupling For 90mm PVC Pipe - Ø90 Female (Cream)		
These Coupling Designed For PVC Pipes , PVC Pipe outside have to be 90mm , Couplings Should be attached to pvc pipes by using PVC Glue Maximum Working Pressure 6 kg / cm2			
PVC13	Coupling For 110mm PVC Pipe - Ø110 Male (Brown)		
PVC14	Coupling For 110mm PVC Pipe - Ø110 Female (Brown)		
These Coupling Designed For PVC Pipes , PVC Pipe outside have to be 110mm , Couplings Should be attached to pvc pipes by using PVC Glue Maximum Working Pressure 6 kg / cm2			
PVC15	Coupling For 114mm PVC Pipe - Ø110 Male (Dark Green)		
PVC16	Coupling For 114mm PVC Pipe - Ø110 Female (Dark Green)		
These Coupling Designed For PVC Pipes , PVC Pipe outside have to be 114mm , Couplings Should be attached to pvc pipes by using PVC Glue Maximum Working Pressure 6 kg / cm2			

Irrigation Systems

Product Code		
PS010	2" - Ø63mm Male End CAP	 Blind Plug
PS011	2, 5" - Ø75 mm Male End CAP	
PS012	3" - Ø90 mm Male End CAP	
PS013	4" - Ø110 mm Male End CAP	
PS020	2" - Ø63mm Elbow	 ELBOW
PS021	2, 5" - Ø 75 mm Elbow	
PS022	3" - Ø90 mm Elbow	
PS023	4" - Ø110 mm Elbow	
PS030	Ø75 / Ø63 mm Reduction	 REDUCTION
PS031	Ø90 / Ø75 mm Reduction	
PS032	Ø110 / Ø75 mm Reduction	
PS033	Ø110 / Ø90 mm Reduction	
PS040	Ø63mm / Ø63mm TE	 TE
PS041	Ø75mm / Ø63mm TE	
PS042	Ø75mm / Ø75mm TE	
PS043	Ø90mm / Ø75mm TE	
PS044	Ø90mm / Ø90mm TE	
PS045	Ø110mm / Ø75mm TE	
PS046	Ø110mm / Ø90mm TE	
PS054	Ø63mm / Ø63mm TE	 Cross TE
PS055	Ø75mm / Ø63mm Cross TE	
PS056	Ø75mm / Ø75mm Cross TE	
PS057	Ø90mm / Ø75mm Cross TE	
PS058	Ø90mm / Ø90mm Cross TE	
PS059	Ø110mm / Ø75mm Cross TE	
PS060	Ø110mm / Ø90mm Cross TE	
PS061	Ø110mm / Ø110mm Cross TE	
PS070	2" - Ø63mm Line Valve	
PS071	2, 5" - Ø75 mm Line Valve	
PS072	3" - Ø90 mm Line Valve	
PS073	4" - Ø110 mm Line Valve	
PS080	2" - Ø63 mm - Abot 1" Outlet	
PS081	2, 5" - Ø75 mm - Abot 1" Outlet	
PS082	3" - Ø 90 mm - Abot 1" Outlet	
PS083	4" - Ø110 mm - Abot 1" Outlet	
PS085	1" PVC Riser 60 cm	
PS086	1" Aluminium Riser 75cm	
PS092	Ø63mm Gasket	 Gasket
PS093	Ø75mm Gasket	
PS094	Ø90mm Gasket	
PS095	Ø110mm Gasket	
PS110	Ø63mm Female Pump Outlet QC - 2" Male Screw BSP	
PS111	Ø75mm Female Pump Outlet QC - 3" Male Screw BSP	
PS112	Ø90mm Female Pump Outlet QC - 3,5" Male Screw BSP	
PS113	Ø90mm Female Pump Outlet QC - 4" Male Screw BSP	
PS114	Ø110mm Female Pump Outlet QC - 4" Male Screw BSP	

Irrigation Systems

Product Code		
LYF001	Ø32mm Male A Part Coupling For 32mm - 1,25" Layflat Hose - 1 Clamp	  
LYF002	Ø51mm Male A Part Coupling For 42mm - 1,5" Layflat Hose - 2 Clamp	
LYF003	Ø63mm Male A Part Coupling for 51mm - 2" Layflat Hose - 2 Clamp	
LYF004	Ø63mm Male A Part Coupling for 55mm - 2,2" Drag Hose - 3 Clamp	
LYF005	Ø75mm Male A Part Coupling For 65mm - 2,5" Layflat Hose - 3 Clamp	
LYF006	Ø75mm Male A Part Coupling For 76mm - 3" Layflat Hose - 3 Clamp	
LYF007	Ø90mm Male A Part Coupling for 90mm- 3,5" Layflat Hose - 4 Clamp	
LYF010	Ø32mm Female B Part Coupling For 32mm - 1,25" Layflat Hose	 
LYF011	Ø51mm Female B Part Coupling For 42mm - 1,5" Layflat Hose	
LYF012	Ø63mm Female B Part Coupling For 51mm - 2" Layflat Hose	
LYF013	Ø63mm Female B Part Coupling for 55mm - 2,2" Drag Hose	
LYF014	Ø75mm Female B Part Coupling For 65mm - 2,5" Layflat Hose	
LYF015	Ø75mm Female B Part Coupling For 76mm - 3" Layflat Hose	
LYF016	Ø90mm Female B Part Coupling For 90mm - 3,5" For Layflat Hose	
LYF020	2" 100 Meter 8 Bar PVC Lay Flat	
LYF021	2,5" 100 Meter 8 Bar PVC Lay Flat	
LYF022	3" 100 Meter 8 Bar PVC Lay Flat	
LYF023	3,5" 50 Meter 6 Bar PVC Lay Flat	
DRAG001	1,25" - 32mm , 60 Meter 12 Bar PVC Drag Hose	
DRAG002	1,5" - 42mm , 70 Meter 12 Bar Nitril Drag Hose	
DRAG003	2" - 51mm , 100 Meter 16 Bar Nitril Drag Hose	
DRAG004	2.2" - 55mm , 100 Meter 16 Bar Nitril Drag Hose	
DRAG005	2,5" - 65mm , 100 Meter 16 Bar Nitril Drag Hose	
DRAG006	3" - 76mm , 100 Meter 16 Bar Nitril Drag Hose	
DRAG007	3,5" - 90mm , 100 Meter 16 Bar Nitril Drag Hose	
CLMP001	1,25" Clamp For LayFlat	
CLMP002	1,5" Clamp For LayFlat	
CLMP003	2" Clamp For LayFlat	
CLMP004	2,5" Clamp for LayFlat	
CLMP005	3" Clamp for LayFlat	
CLMP006	3,5" Clamp for Layflat	



Product Code	Pipe System	
PS054	63mm / 63mm Cross TE	 Cross TE
PS055	75mm / 63mm Cross TE	
PS056	75mm / 75mm Cross TE	
PS057	90mm / 75mm Cross TE	
PS058	90mm / 90mm Cross TE	
PS059	110mm / 75mm Cross TE	
PS060	110mm / 90mm Cross TE	
PS061	110mm / 110mm Cross TE	
PS062	125mm / 75mm Cross TE	
PS063	125mm / 90mm Cross TE	
PS064	125mm / 110mm Cross TE	
PS065	125mm / 125mm Cross TE	
PS066	160mm / 125mm Cross TE	
PS070	2" - 63mm Line Valve	
PS071	2, 5" - 75 mm Line Valve	
PS072	3" - 90 mm Line Valve	
PS073	4" - 110 mm Line Valve	
PS075	2, 5" - 75 mm Line Valve (Metal PN10)	
PS076	3" - 90 mm Line Valve (Metal PN10)	
PS077	4" - 110 mm Line Valve (Metal PN10)	
PS080	2" - 63 mm - Abot 1" Outlet	
PS081	2, 5" - 75 mm - Abot 1" Outlet	
PS082	3" - 90 mm - Abot 1" Outlet	
PS083	4" - 110 mm - Abot 1" Outlet	
PS085	1" PVC Riser 60 cm	 Gasket
PS086	1" Aluminium Riser 75cm	
PS090	Ø32mm Gasket	
PS091	Ø51mm Gasket	
PS092	Ø63mm Gasket	
PS093	Ø75mm Gasket	
PS094	Ø90mm Gasket	
PS095	Ø110mm Gasket	
PS096	Ø125mm Gasket	
PS097	Ø160mm Gasket	
PS100	Suction Pipe 2" PVC - 51mm Each Meter	
PS101	Suction Pipe 2,5" PVC - 65mm Each Meter	
PS102	Suction Pipe 3" PVC - 76mm Each Meter	
PS103	Suction Pipe 4" PVC - 101mm Each Meter	
PS104	Suction Pipe 5" PVC - 125mm Each Meter	
PS110	63mm Female Pump Outlet QC - 2" Male Screw BSP	
PS111	75mm Female Pump Outlet QC - 3" Male Screw BSP	
PS112	90mm Female Pump Outlet QC - 3,5" Male Screw BSP	
PS113	90mm Female Pump Outlet QC - 4" Male Screw BSP	
PS114	110mm Female Pump Outlet QC - 4" Male Screw BSP	
PS115	125mm Female Pump Outlet QC - 5" Male Screw BSP	
PS116	160mm Female Pump Outlet QC - 6" Male Screw BSP	
PS120	Suction Valve - 3" - 76mm with 4 pcs Clamp	
PS121	Suction Valve - 4" - 101mm with 4 pcs Clamp	
PS122	Suction Valve - 5" - 125mm with 4 pcs Clamp	

Irrigation Systems

Product Code		
PS001	2" - Ø63mm - QC Pipe System Price For 5.8 Meter Pipe lenght - PN6	
PS002	2, 5" - Ø75 mm - QC Pipe System Price For 5.8 Meter Pipe lenght - PN6	
PS003	3" - Ø90 mm - QC Pipe System Price For 5.8 Meter Pipe lenght - PN6	
PS004	4" - Ø110 mm - QC Pipe System Price For 5.8 Meter Pipe lenght - PN8	
PS005	5" - Ø125 mm - QC Pipe System Price For 5.8 Meter Pipe lenght - PN8	
PS006	6" - Ø160 mm - QC Pipe System Price For 5.8 Meter Pipe lenght - PN8	
PS010	2" - 63mm Male End CAP	 Bling Plug
PS011	2, 5" - 75 mm Male End CAP	
PS012	3" - 90 mm Male End CAP	
PS013	4" - 110 mm Male End CAP	
PS014	5" - 125 mm Male End CAP	
PS015	6" - 160 mm Male End CAP	
PS020	2" - 63mm Elbow	 ELBOW
PS021	2, 5" - 75 mm Elbow	
PS022	3" - 90 mm Elbow	
PS023	4" - 110 mm Elbow	
PS024	5" - 125 mm Elbow	
PS025	6" - 160 mm Elbow	
PS030	75 / 63 mm Reduction	REDUCTION 
PS031	90 / 75 mm Reduction	
PS032	110 / 75 mm Reduction	
PS033	110 / 90 mm Reduction	
PS034	125 / 75 mm Reduction	
PS035	125 / 90 mm Reduction	
PS036	125 / 110 mm Reduction	
PS037	160 / 110 mm Reduction	
PS038	160 / 125 mm Reduction	
PS040	63mm / 63mm TE	 TE
PS041	75mm / 63mm TE	
PS042	75mm / 75mm TE	
PS043	90mm / 75mm TE	
PS044	90mm / 90mm TE	
PS045	110mm / 75mm TE	
PS046	110mm / 90mm TE	
PS047	110mm / 110mm TE	
PS048	125mm / 75mm TE	
PS049	125mm / 90mm TE	
PS050	125mm / 110mm TE	
PS051	125mm / 125mm TE	
PS052	160mm / 110mm TE	
PS053	160mm / 125mm TE	
PS054	160mm / 160mm TE	


Pumps Prices

Product Code

P001



2,5 HP Gasoline Motopump Self Suction

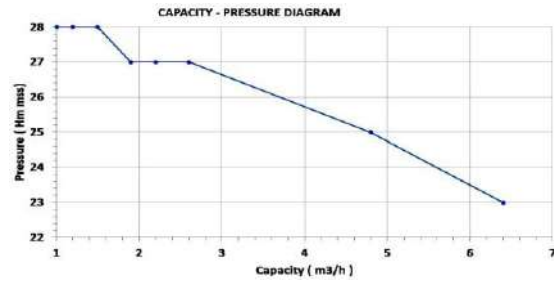


Suction 1" , Outlet 1" Female

P002



6,5 HP Gasoline Motopump Self Suction

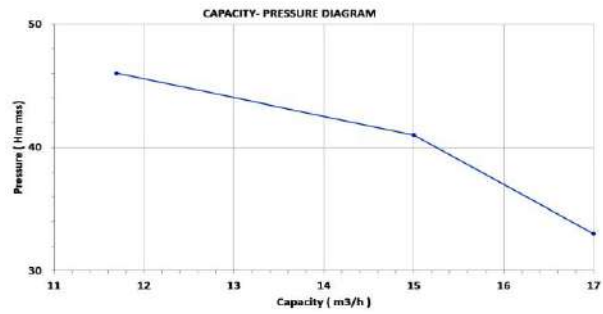


Suction 2" , Outlet 2" Female

P003



13 HP Gasoline Motopump High Pressure - Electric Start

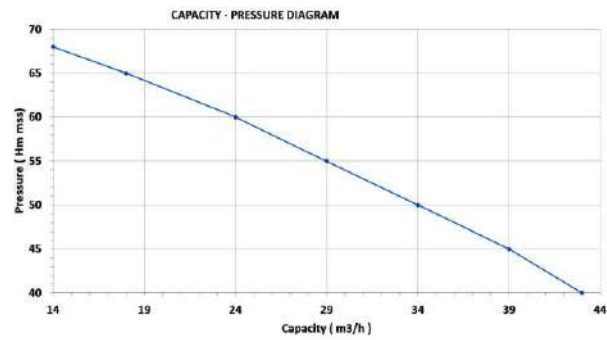


Suction 3" , Outlet 2,5" Female





P004











20 HP Gasoline Motopump High Pressure - Electric Start

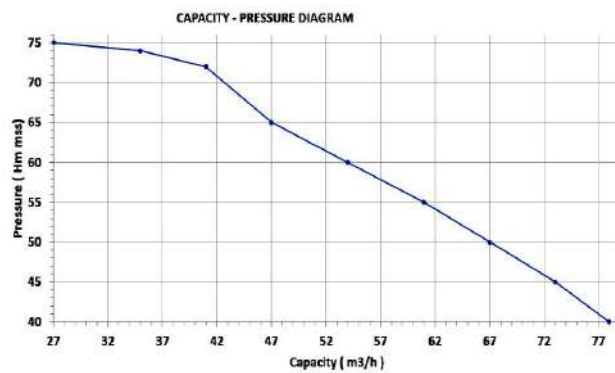

Suction 3" , Outlet 2,5" Female

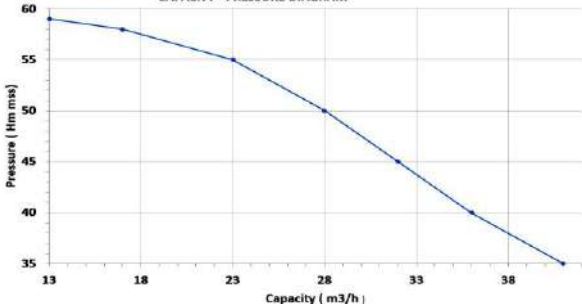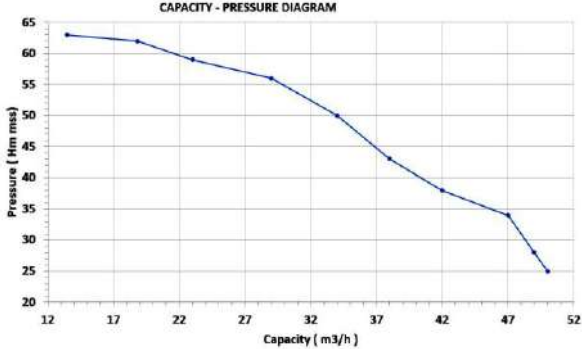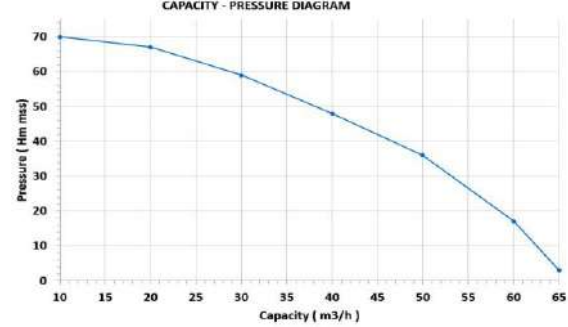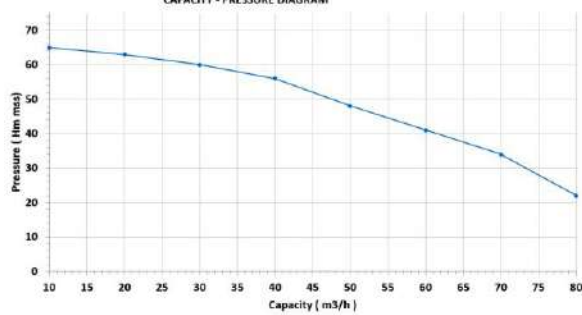
Product Code	Pumps Prices																																	
P005		9 HP Diesel Motopump High Pressure - Electric Start CAPACITY - PRESSURE DIAGRAM <table border="1"><caption>Data for P005 Capacity - Pressure Diagram</caption><thead><tr><th>Capacity (m3/h)</th><th>Pressure (ftm mss)</th></tr></thead><tbody><tr><td>13</td><td>59</td></tr><tr><td>18</td><td>58</td></tr><tr><td>23</td><td>55</td></tr><tr><td>28</td><td>50</td></tr><tr><td>33</td><td>45</td></tr><tr><td>38</td><td>35</td></tr></tbody></table> Suction 3" , Outlet 2,5" Female	Capacity (m3/h)	Pressure (ftm mss)	13	59	18	58	23	55	28	50	33	45	38	35																		
Capacity (m3/h)	Pressure (ftm mss)																																	
13	59																																	
18	58																																	
23	55																																	
28	50																																	
33	45																																	
38	35																																	
P006		11 HP Diesel Motopump High Pressure - Electric Start - Exhaust Primart Suction CAPACITY - PRESSURE DIAGRAM <table border="1"><caption>Data for P006 Capacity - Pressure Diagram</caption><thead><tr><th>Capacity (m3/h)</th><th>Pressure (ftm mss)</th></tr></thead><tbody><tr><td>12</td><td>63</td></tr><tr><td>17</td><td>62</td></tr><tr><td>22</td><td>59</td></tr><tr><td>27</td><td>56</td></tr><tr><td>32</td><td>50</td></tr><tr><td>37</td><td>43</td></tr><tr><td>42</td><td>38</td></tr><tr><td>47</td><td>34</td></tr><tr><td>52</td><td>25</td></tr></tbody></table> Suction 3" , 3" Female	Capacity (m3/h)	Pressure (ftm mss)	12	63	17	62	22	59	27	56	32	50	37	43	42	38	47	34	52	25												
Capacity (m3/h)	Pressure (ftm mss)																																	
12	63																																	
17	62																																	
22	59																																	
27	56																																	
32	50																																	
37	43																																	
42	38																																	
47	34																																	
52	25																																	
P007		13 HP Diesel Motopump - Rope Start																																
P008		13 HP Diesel Motopump - Electric Start																																
		CAPACITY - PRESSURE DIAGRAM <table border="1"><caption>Data for P007/P008 Capacity - Pressure Diagram</caption><thead><tr><th>Capacity (m3/h)</th><th>Pressure (ftm mss)</th></tr></thead><tbody><tr><td>10</td><td>70</td></tr><tr><td>15</td><td>68</td></tr><tr><td>20</td><td>66</td></tr><tr><td>25</td><td>63</td></tr><tr><td>30</td><td>59</td></tr><tr><td>35</td><td>54</td></tr><tr><td>40</td><td>48</td></tr><tr><td>45</td><td>42</td></tr><tr><td>50</td><td>35</td></tr><tr><td>55</td><td>25</td></tr><tr><td>60</td><td>15</td></tr><tr><td>65</td><td>0</td></tr></tbody></table> Suction 4" , Outlet 4" Female	Capacity (m3/h)	Pressure (ftm mss)	10	70	15	68	20	66	25	63	30	59	35	54	40	48	45	42	50	35	55	25	60	15	65	0						
Capacity (m3/h)	Pressure (ftm mss)																																	
10	70																																	
15	68																																	
20	66																																	
25	63																																	
30	59																																	
35	54																																	
40	48																																	
45	42																																	
50	35																																	
55	25																																	
60	15																																	
65	0																																	
P009		17 HP Diesel Motopump 1 Stage - Electric Start CAPACITY - PRESSURE DIAGRAM <table border="1"><caption>Data for P009 Capacity - Pressure Diagram</caption><thead><tr><th>Capacity (m3/h)</th><th>Pressure (ftm mss)</th></tr></thead><tbody><tr><td>10</td><td>65</td></tr><tr><td>15</td><td>64</td></tr><tr><td>20</td><td>63</td></tr><tr><td>25</td><td>61</td></tr><tr><td>30</td><td>59</td></tr><tr><td>35</td><td>57</td></tr><tr><td>40</td><td>55</td></tr><tr><td>45</td><td>51</td></tr><tr><td>50</td><td>47</td></tr><tr><td>55</td><td>42</td></tr><tr><td>60</td><td>37</td></tr><tr><td>65</td><td>32</td></tr><tr><td>70</td><td>27</td></tr><tr><td>75</td><td>22</td></tr><tr><td>80</td><td>20</td></tr></tbody></table> Suction 4" , Outlet 4" Female	Capacity (m3/h)	Pressure (ftm mss)	10	65	15	64	20	63	25	61	30	59	35	57	40	55	45	51	50	47	55	42	60	37	65	32	70	27	75	22	80	20
Capacity (m3/h)	Pressure (ftm mss)																																	
10	65																																	
15	64																																	
20	63																																	
25	61																																	
30	59																																	
35	57																																	
40	55																																	
45	51																																	
50	47																																	
55	42																																	
60	37																																	
65	32																																	
70	27																																	
75	22																																	
80	20																																	

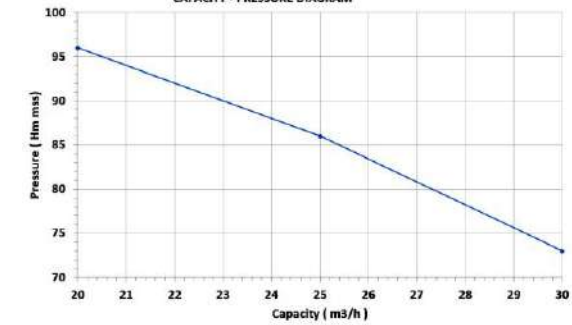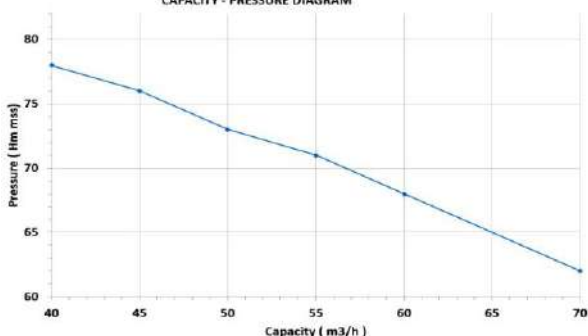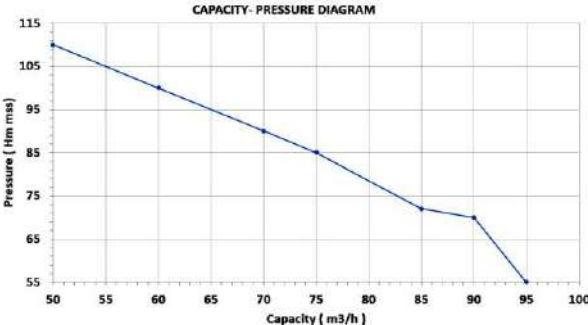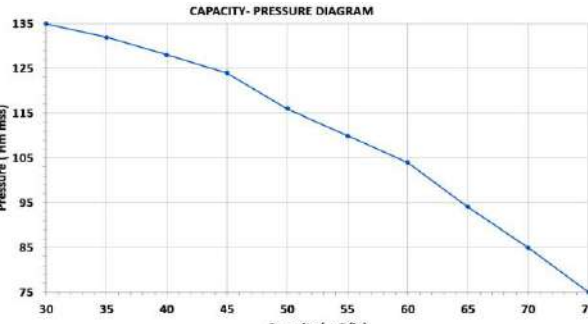Product Code	Pumps	
P011		17 HP Lombardini Diesel Motopump 4 Stage - Electric Start CAPACITY - PRESSURE DIAGRAM  Suction 3" Female Outlet 2,5" Female
P012		28,5 HP Lombardini Diesel Motopump - Electric Start CAPACITY - PRESSURE DIAGRAM  Suction 3" Female Outlet 2,5" Female
P013		45 HP Diesel Motopump Water Cooler - 3 Stage With Trailer CAPACITY - PRESSURE DIAGRAM  Suction 4" Female Outlet 3" Female
P014		45 HP Diesel Motopump Water Cooler - 4 Stage With Trailer CAPACITY - PRESSURE DIAGRAM  Suction 3" Female Outlet 3" Female

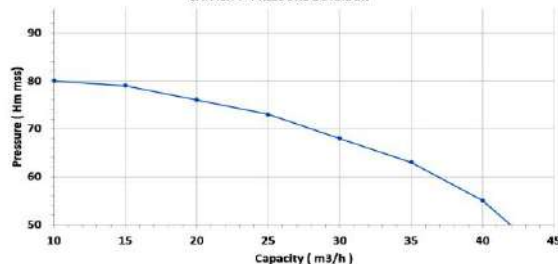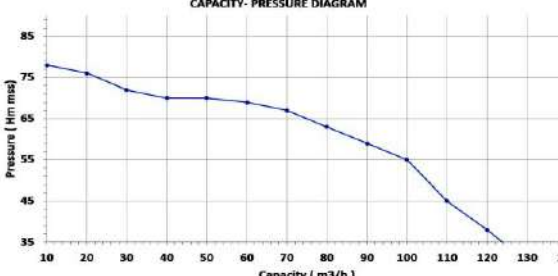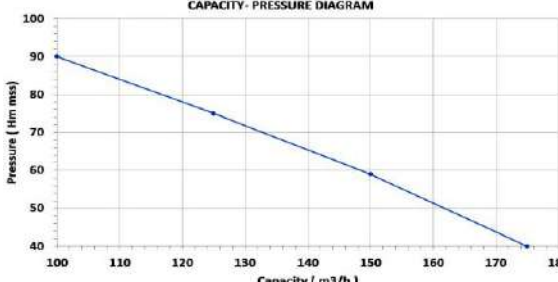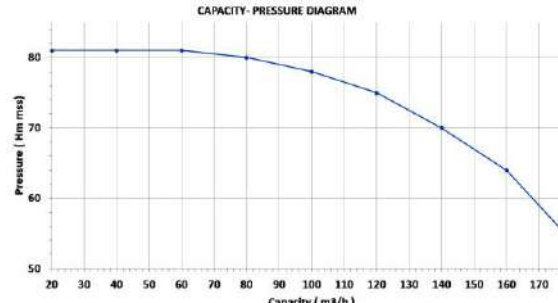
Product Code	Pipe And Pumps																																					
P020		DuCaR Pump 50 Inlet Size 3" Outlet Size 2,5" CAPACITY- PRESSURE DIAGRAM  <table><thead><tr><th>Capacity (m3/h)</th><th>Pressure (Hm mss)</th></tr></thead><tbody><tr><td>10</td><td>80</td></tr><tr><td>15</td><td>79</td></tr><tr><td>20</td><td>76</td></tr><tr><td>25</td><td>73</td></tr><tr><td>30</td><td>68</td></tr><tr><td>35</td><td>63</td></tr><tr><td>40</td><td>55</td></tr><tr><td>42</td><td>50</td></tr></tbody></table>	Capacity (m3/h)	Pressure (Hm mss)	10	80	15	79	20	76	25	73	30	68	35	63	40	55	42	50																		
Capacity (m3/h)	Pressure (Hm mss)																																					
10	80																																					
15	79																																					
20	76																																					
25	73																																					
30	68																																					
35	63																																					
40	55																																					
42	50																																					
P021		DuCaR Pump 80 Inlet Size 4" Outlet Size 4" CAPACITY- PRESSURE DIAGRAM  <table><thead><tr><th>Capacity (m3/h)</th><th>Pressure (Hm mss)</th></tr></thead><tbody><tr><td>10</td><td>78</td></tr><tr><td>20</td><td>75</td></tr><tr><td>30</td><td>71</td></tr><tr><td>40</td><td>69</td></tr><tr><td>50</td><td>69</td></tr><tr><td>60</td><td>67</td></tr><tr><td>70</td><td>64</td></tr><tr><td>80</td><td>60</td></tr><tr><td>90</td><td>56</td></tr><tr><td>100</td><td>51</td></tr><tr><td>110</td><td>44</td></tr><tr><td>120</td><td>35</td></tr></tbody></table>	Capacity (m3/h)	Pressure (Hm mss)	10	78	20	75	30	71	40	69	50	69	60	67	70	64	80	60	90	56	100	51	110	44	120	35										
Capacity (m3/h)	Pressure (Hm mss)																																					
10	78																																					
20	75																																					
30	71																																					
40	69																																					
50	69																																					
60	67																																					
70	64																																					
80	60																																					
90	56																																					
100	51																																					
110	44																																					
120	35																																					
P022		DuCaR Pump 80/2 Inlet Size 4" Outlet Size 4" CAPACITY- PRESSURE DIAGRAM  <table><thead><tr><th>Capacity (m3/h)</th><th>Pressure (Hm mss)</th></tr></thead><tbody><tr><td>100</td><td>90</td></tr><tr><td>110</td><td>82</td></tr><tr><td>120</td><td>75</td></tr><tr><td>130</td><td>68</td></tr><tr><td>140</td><td>62</td></tr><tr><td>150</td><td>56</td></tr><tr><td>160</td><td>50</td></tr><tr><td>170</td><td>44</td></tr><tr><td>175</td><td>40</td></tr></tbody></table>	Capacity (m3/h)	Pressure (Hm mss)	100	90	110	82	120	75	130	68	140	62	150	56	160	50	170	44	175	40																
Capacity (m3/h)	Pressure (Hm mss)																																					
100	90																																					
110	82																																					
120	75																																					
130	68																																					
140	62																																					
150	56																																					
160	50																																					
170	44																																					
175	40																																					
P023		DuCaR Pump 125 Inlet Sizes" Outlet Size 5" CAPACITY- PRESSURE DIAGRAM  <table><thead><tr><th>Capacity (m3/h)</th><th>Pressure (Hm mss)</th></tr></thead><tbody><tr><td>20</td><td>81</td></tr><tr><td>30</td><td>81</td></tr><tr><td>40</td><td>81</td></tr><tr><td>50</td><td>81</td></tr><tr><td>60</td><td>81</td></tr><tr><td>70</td><td>80</td></tr><tr><td>80</td><td>79</td></tr><tr><td>90</td><td>77</td></tr><tr><td>100</td><td>75</td></tr><tr><td>110</td><td>72</td></tr><tr><td>120</td><td>68</td></tr><tr><td>130</td><td>64</td></tr><tr><td>140</td><td>60</td></tr><tr><td>150</td><td>56</td></tr><tr><td>160</td><td>52</td></tr><tr><td>170</td><td>48</td></tr><tr><td>180</td><td>44</td></tr></tbody></table>	Capacity (m3/h)	Pressure (Hm mss)	20	81	30	81	40	81	50	81	60	81	70	80	80	79	90	77	100	75	110	72	120	68	130	64	140	60	150	56	160	52	170	48	180	44
Capacity (m3/h)	Pressure (Hm mss)																																					
20	81																																					
30	81																																					
40	81																																					
50	81																																					
60	81																																					
70	80																																					
80	79																																					
90	77																																					
100	75																																					
110	72																																					
120	68																																					
130	64																																					
140	60																																					
150	56																																					
160	52																																					
170	48																																					
180	44																																					

Complate Irrigation Kits


IRRIFORCE MIDI TD2000-200 COMPLATE IRRIGATION KIT FOR 5,5 HA

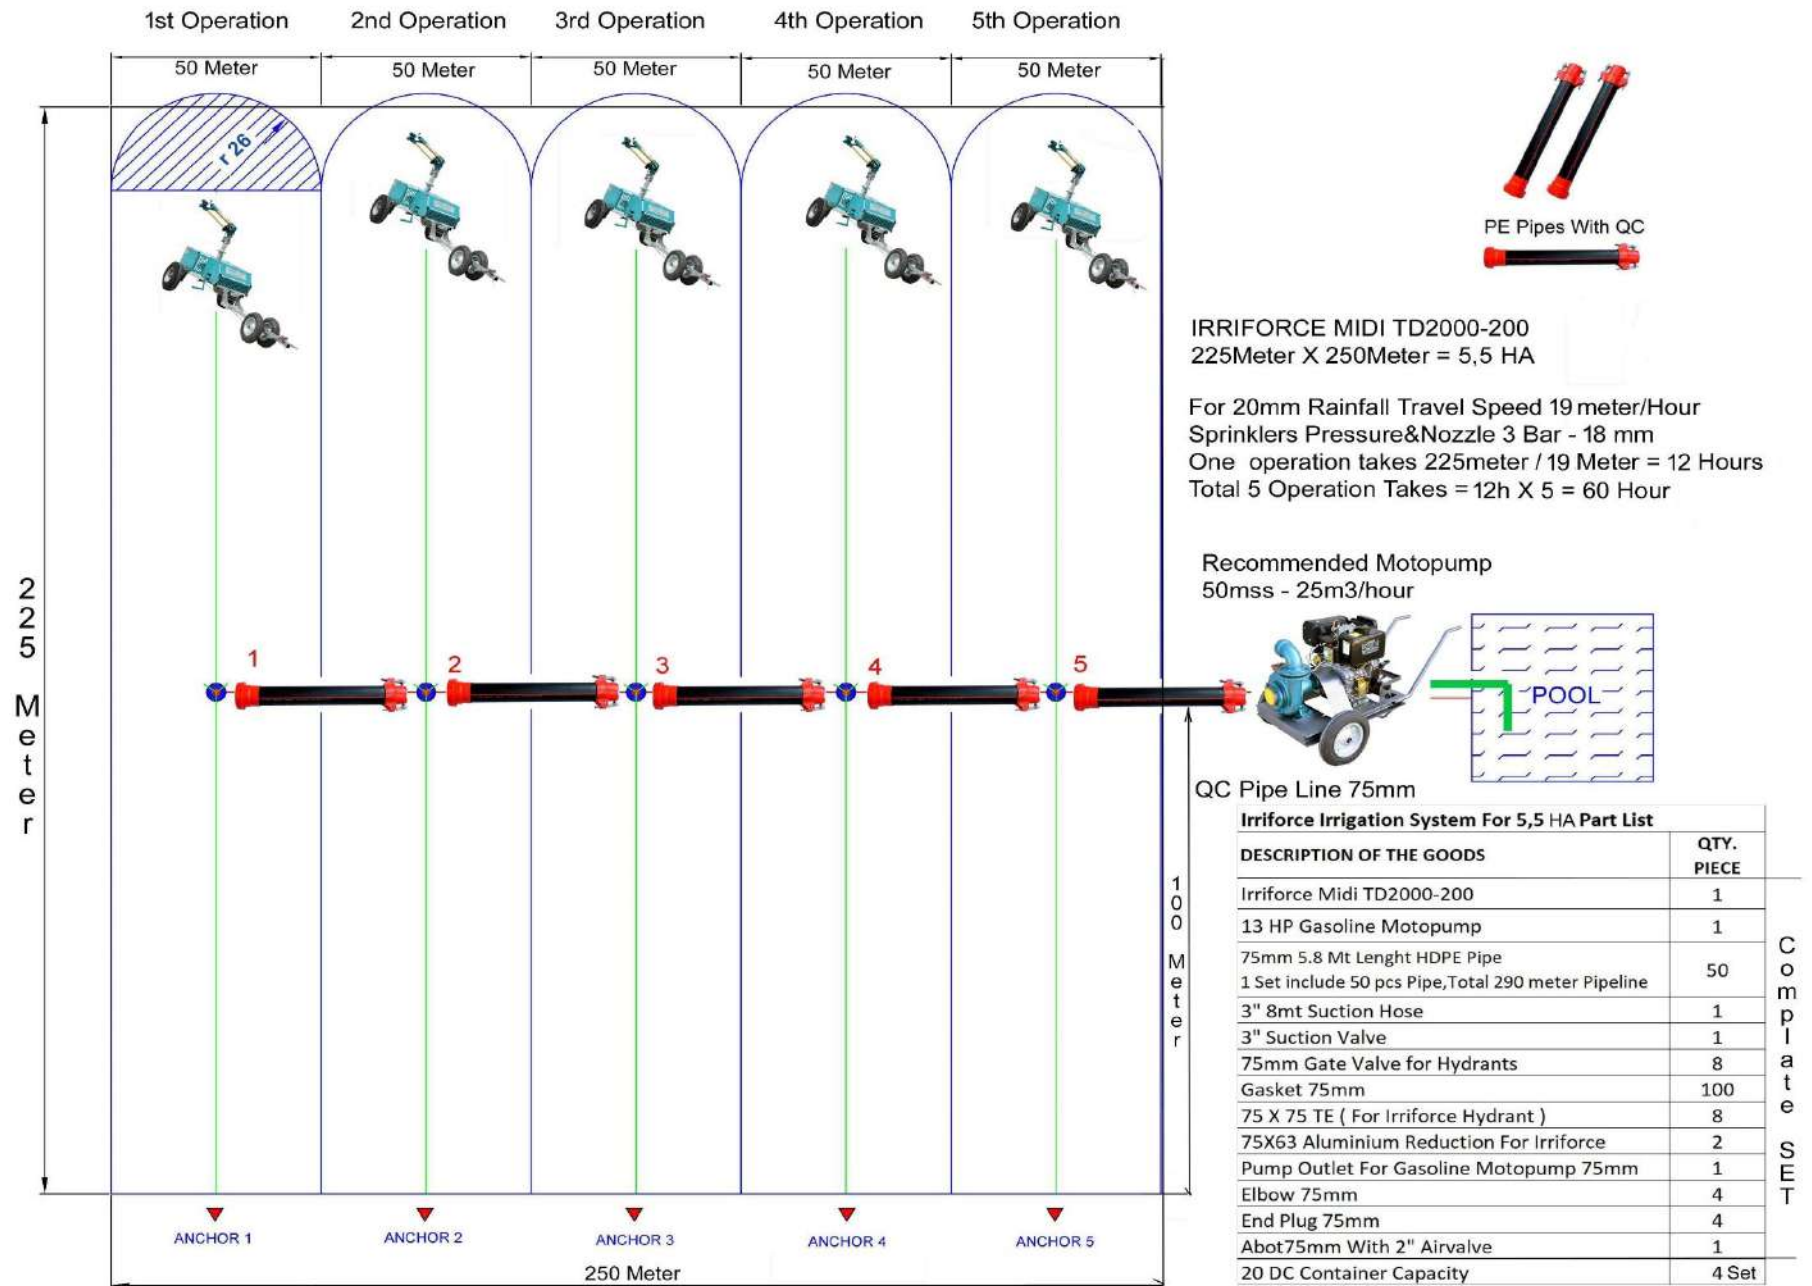


IRRIFORCE MICO&MIDI TD2000-200 COMPLATE IRRIGATION KIT FOR 7.8 HA

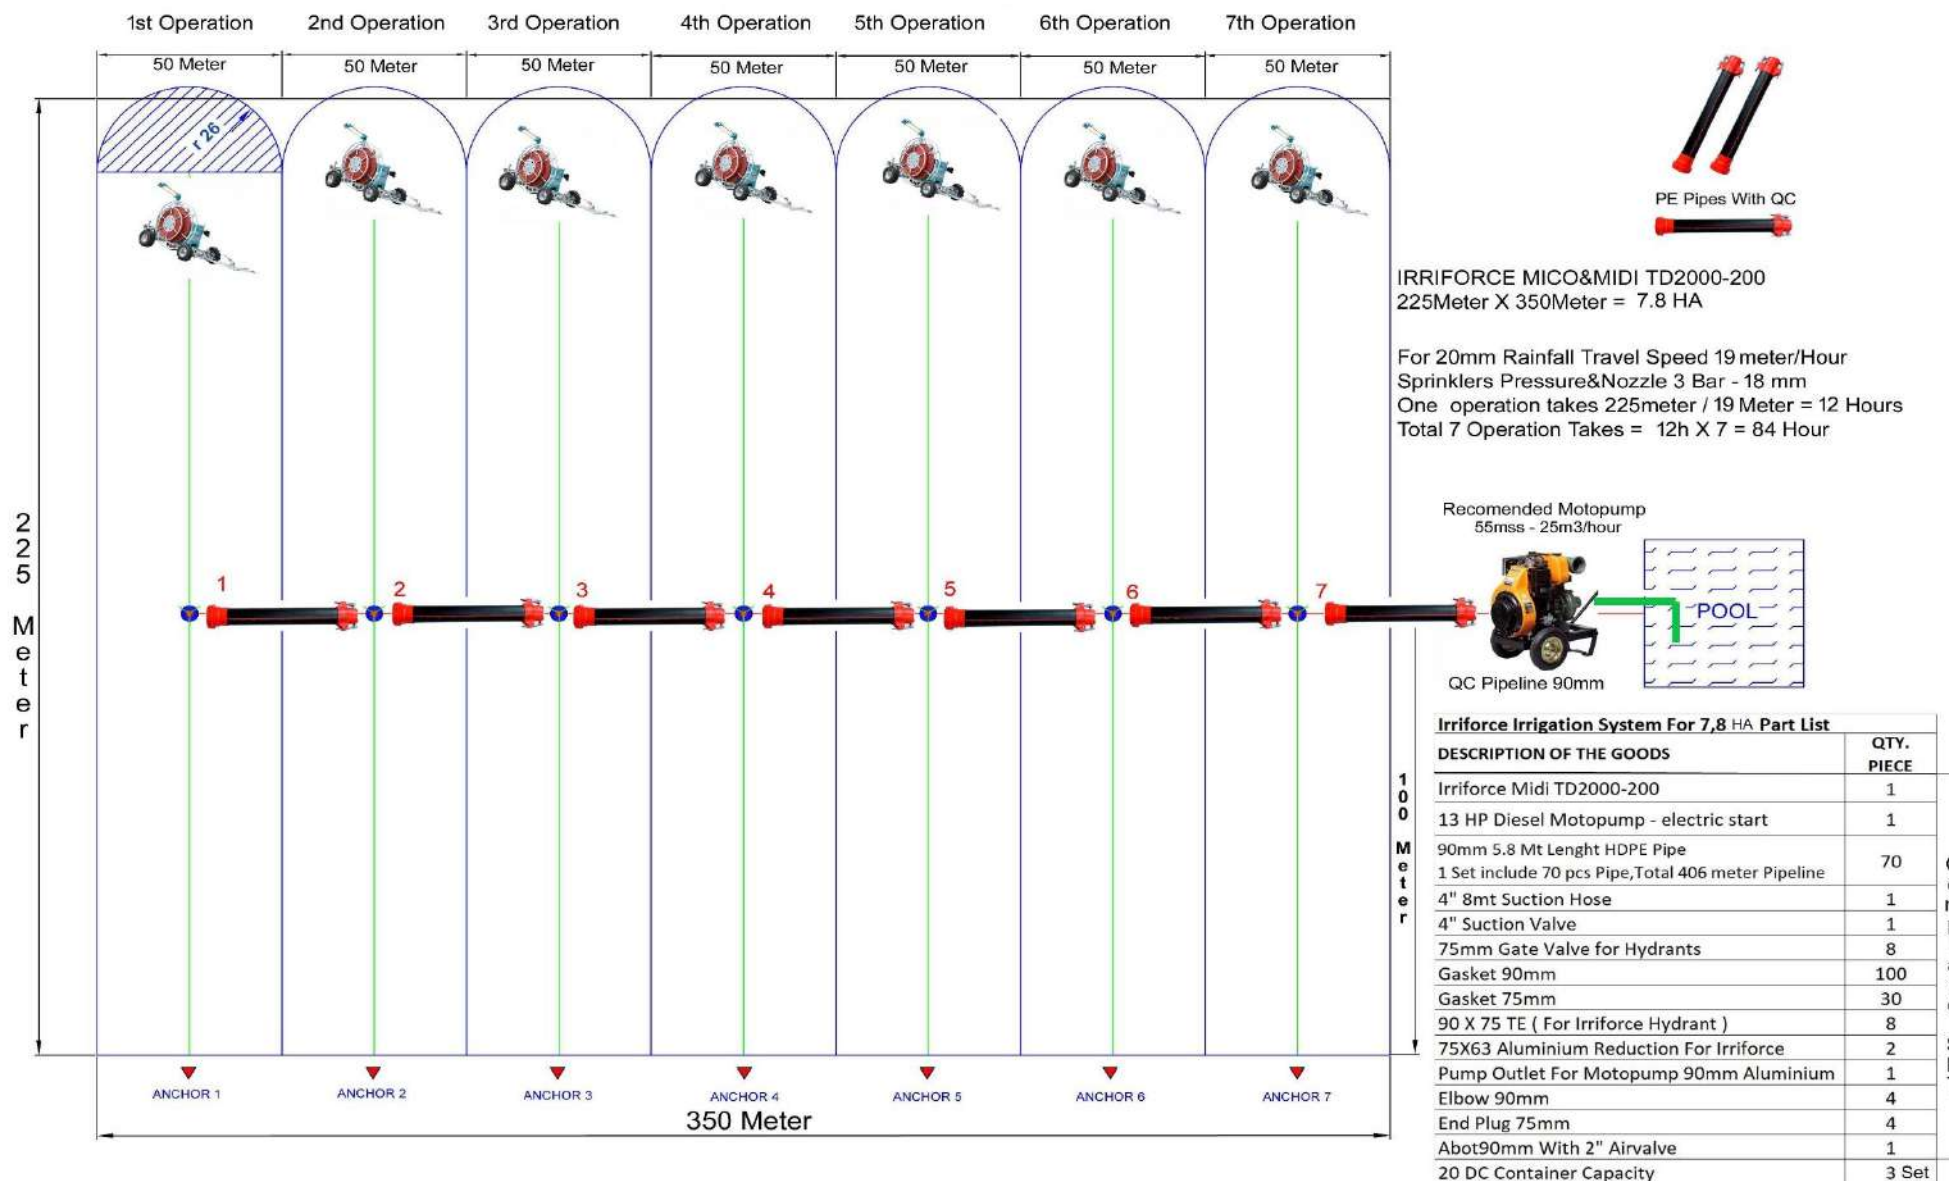


IRRIFORCE MICO TD2000-300 COMPLATE IRRIGATION KIT FOR 11 HA

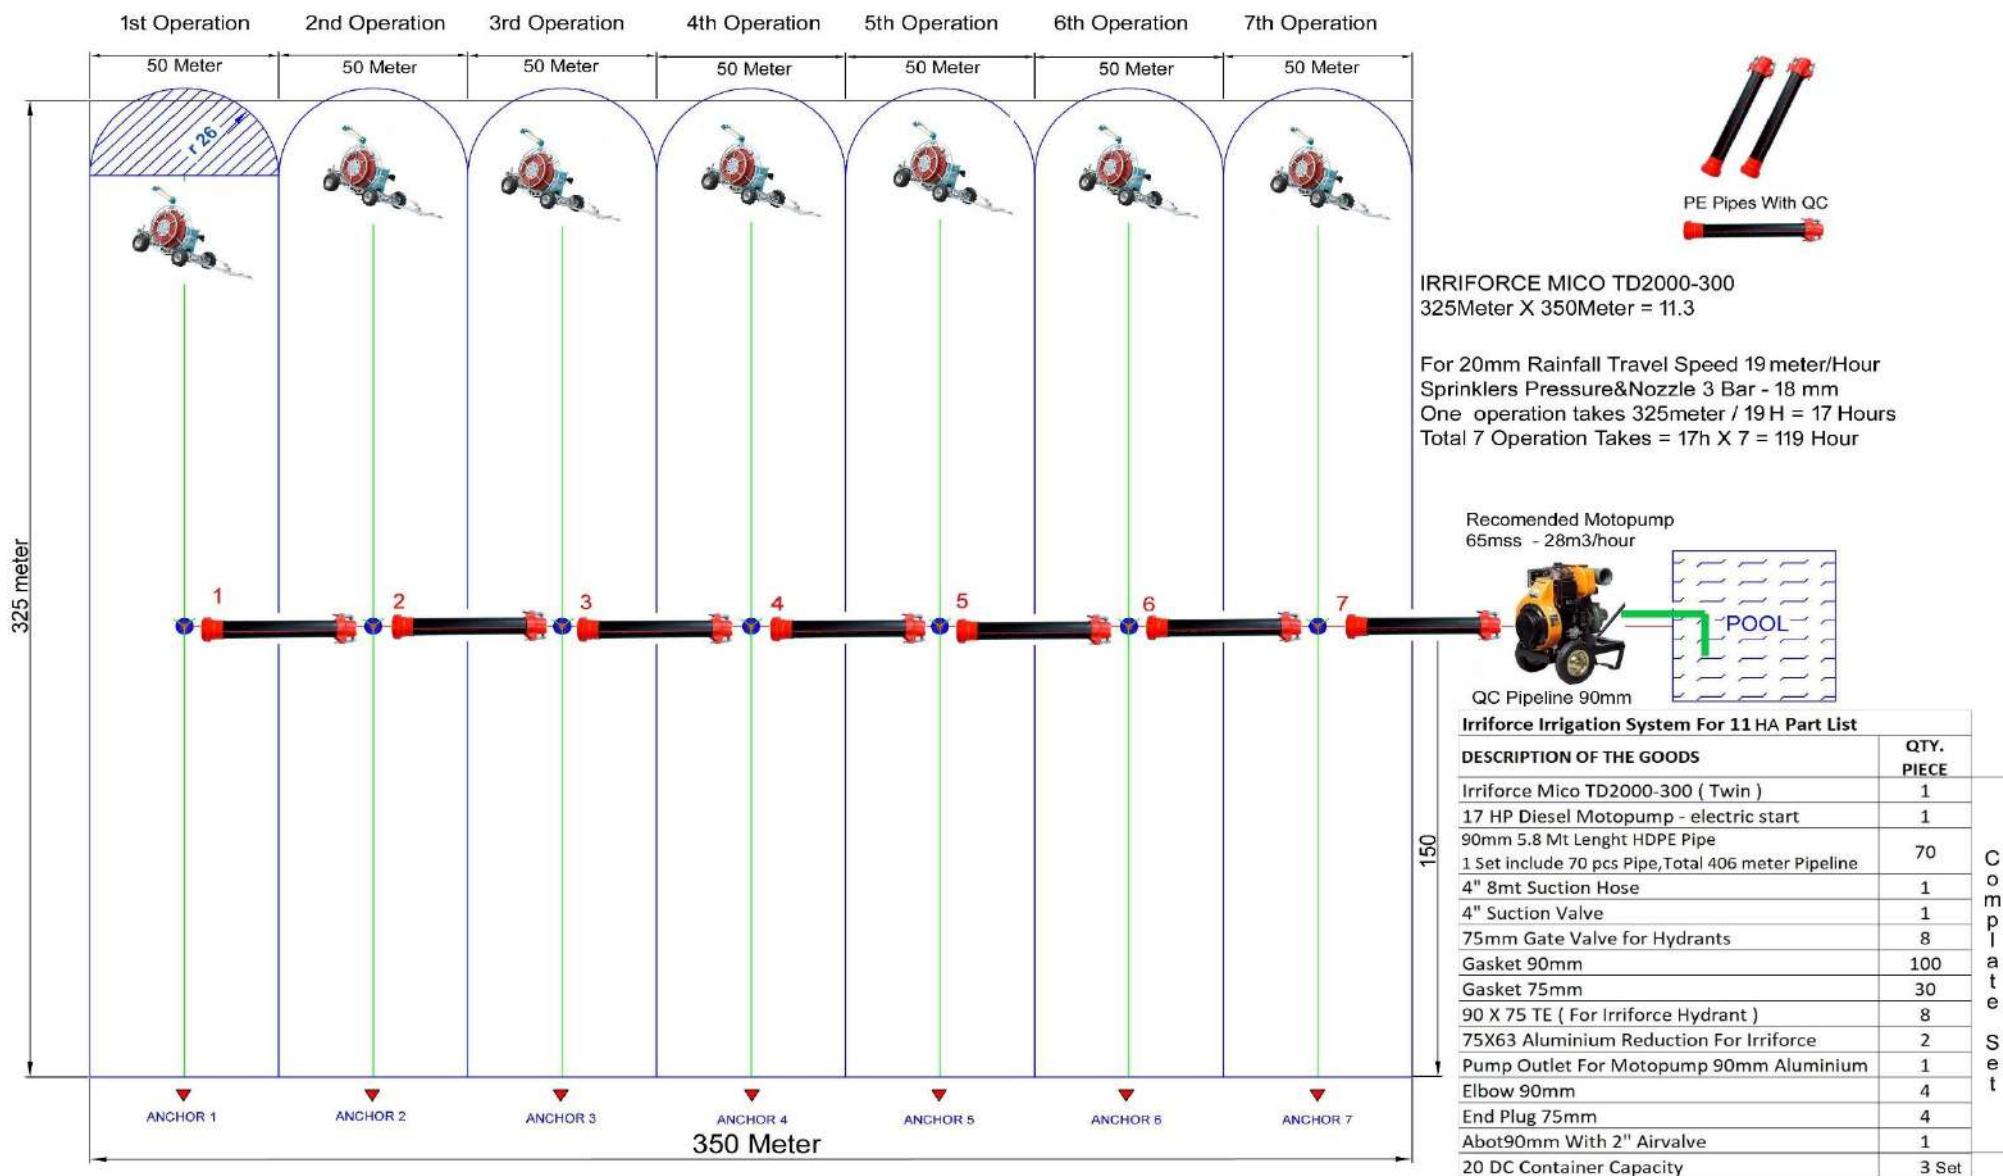


IRRIFORCE MICO X TD2500-300 COMPLATE IRRIGATION KIT FOR 13 HA

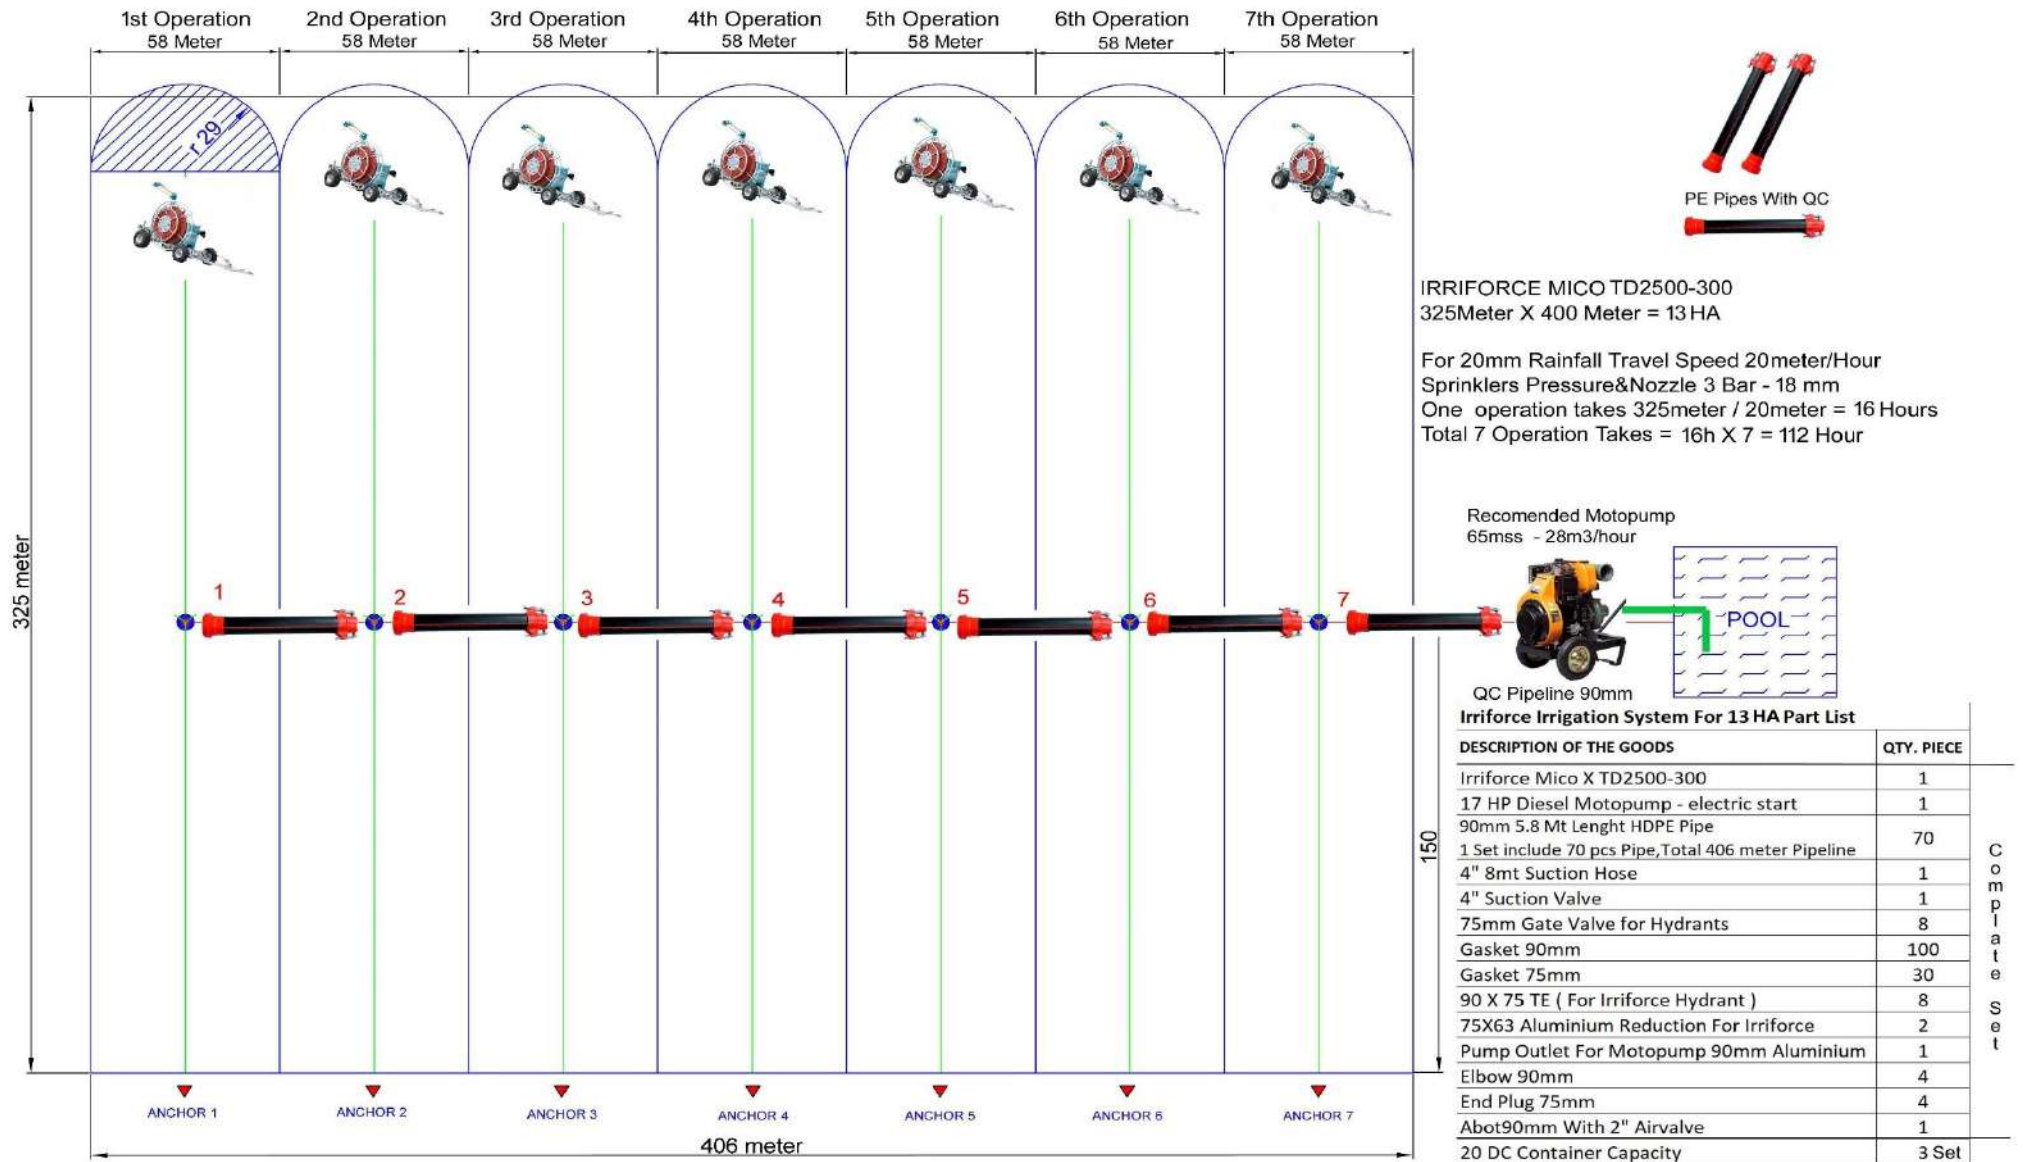


IRRIFORCE ECO TD3000 - 400 COMPLATE IRRIGATION KIT FOR 20.8 HA

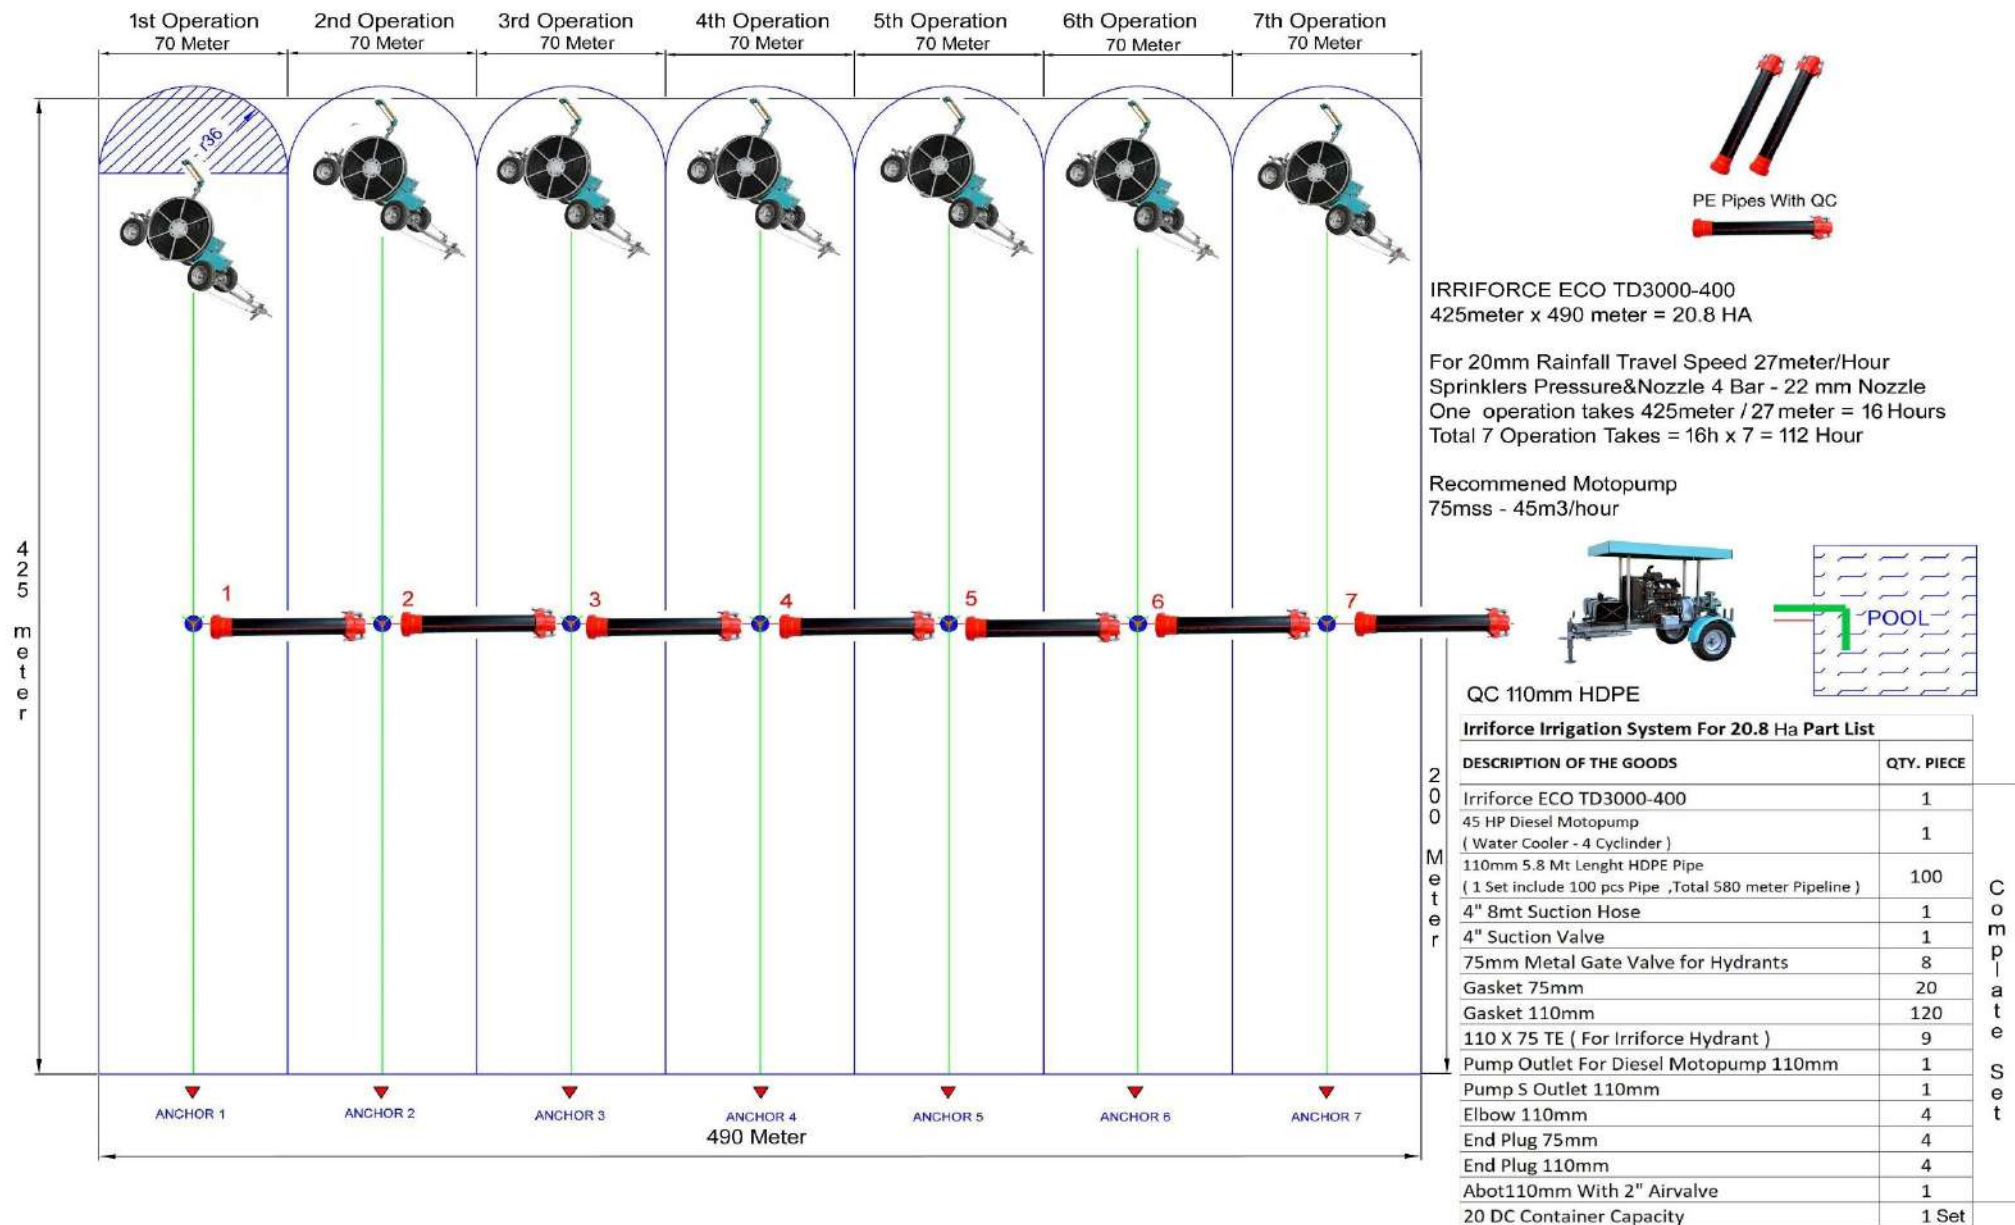

IRRIFORCE ULTRA TD3500 - 500 COMPLATE IRRIGATION KIT FOR 29.5 HA

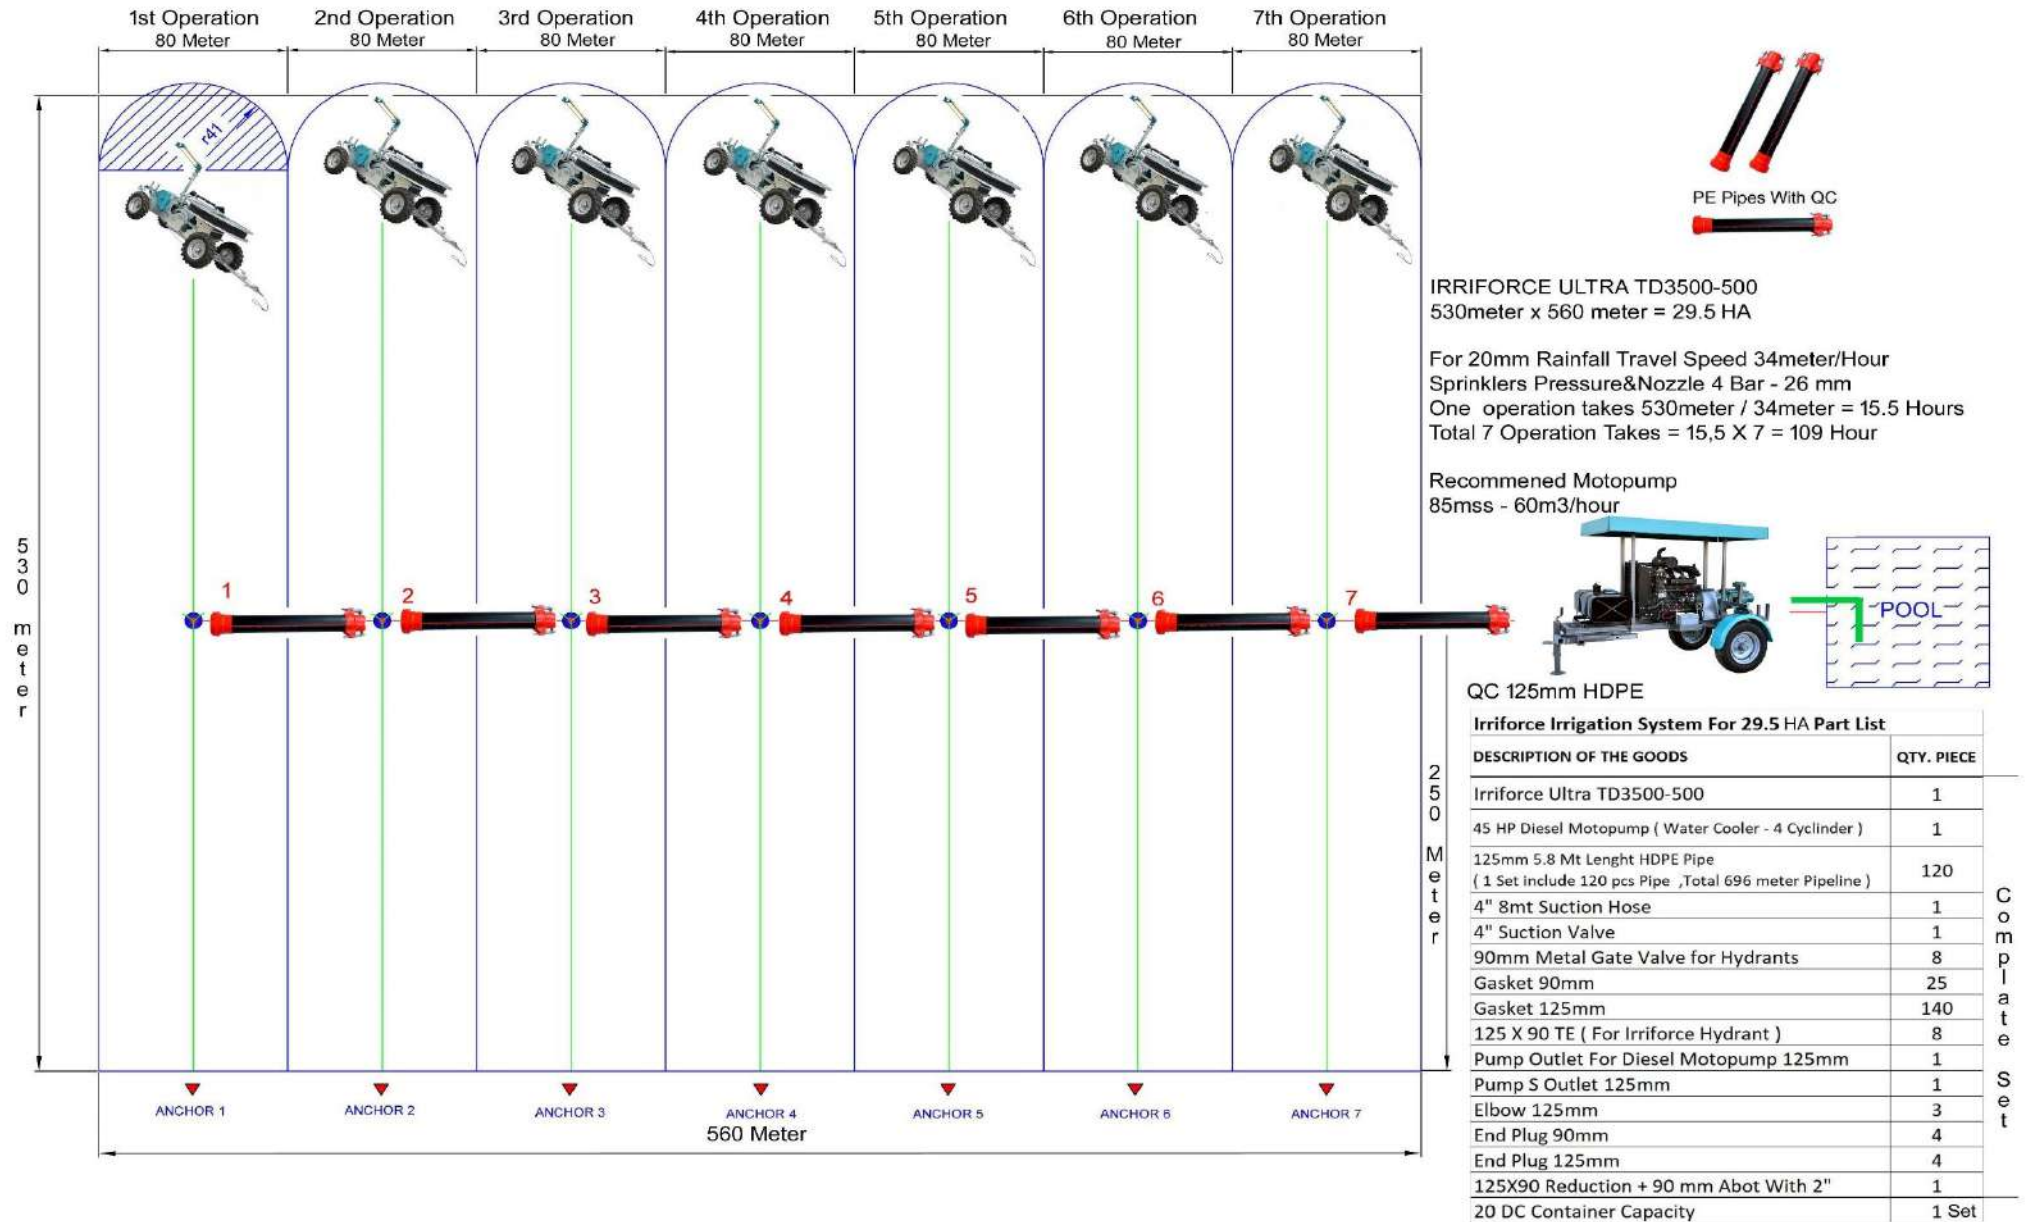


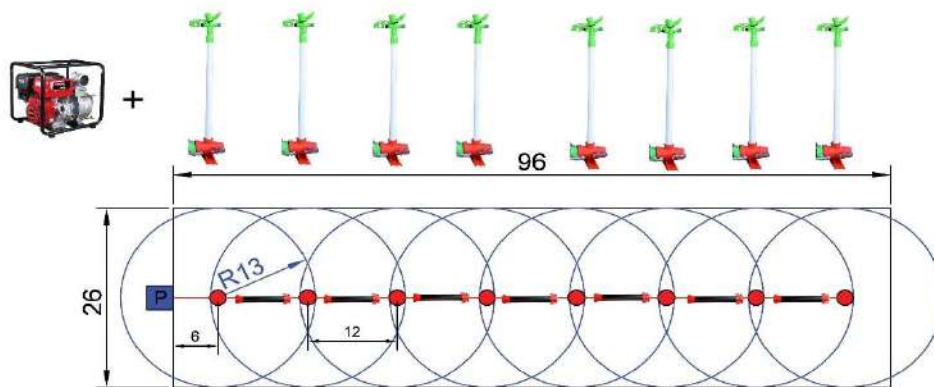

Atom15 LF (4.5X2.5) X 8 Sprinkler - 6.5 HP High Pressure Motopump
Total Irrigated Area : 2500m² - Irrigation Pipe Diameter : 63mm


Sprinkler Irrigation Kit For 2500m ² - KIT1	
Description Of the Goods	QTY. Piece
Atom15 LF Sprinkler	8
63mm Elbow	2
suction hose 2" 6mt	1
63mm Abot	8
1" Plastic Riser 60cm	8
63mm Gasket	45
63mm HDPE Pipe 5.8meter (Total Lenght 5.8 X 25= 145 Meter)	25
Blind Plug 63mm	1
6.5 HP High Pressure Gasoline Motopump	1

Atom22 (8mm Nozzle) X 6 Sprinkler - 10 HP High Pressure Motopump
Total Irrigated Area : 4500m² - Irrigation Pipe Diameter : 75mm

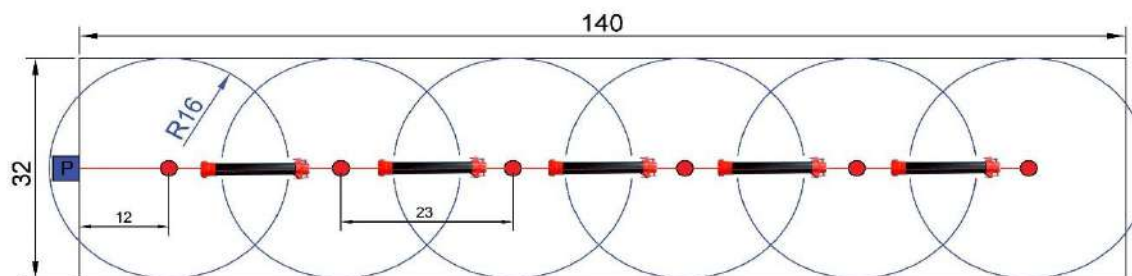


Sprinkler Irrigation Kit For 4500m ² - KIT2	
Description Of the Goods	QTY. Piece
Atom22 Sprinkler	6
75mm Elbow	2
suction hose 3" 8mt	1
75mm Abot	6
1" Mini Eco Connection Stant	6
75mm Gasket	50
75mm HDPE Pipe 5.8meter (Total Lenght 5.8m X 30 = 174 Meter)	30
Blind Plug 75mm	1
13 HP High Pressure Gasoline Motopump	1



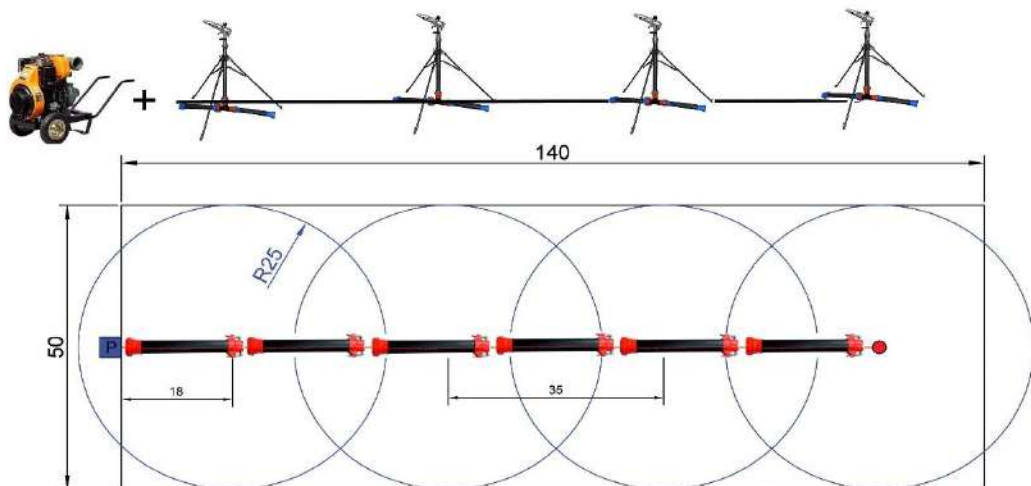

ATOM35 (14mm Nozzle) X 4 Sprinkler - 17 HP Diesel Motopump
Total Irrigated Area : 7000m² - Irrigation Pipe Diameter : 90mm

Sprinkler Irrigation Kit For 7000m ² - KIT3	
Description Of the Goods	QTY. Piece
Atom35 Sprinkler	4
90mm Elbow	2
suction hose 4" 8mt with suction valve	1
90X75 TE	5
4 POD Connection Stant With QC	4
90mm Gasket	50
90mm HDPE Pipe 5.8meter (Total Lenght 5.8m X 35 = 203 Meter)	35
Blind Plug 90mm	2
Blind Plug 75mm	1
17 HP Diesel Motopump	1

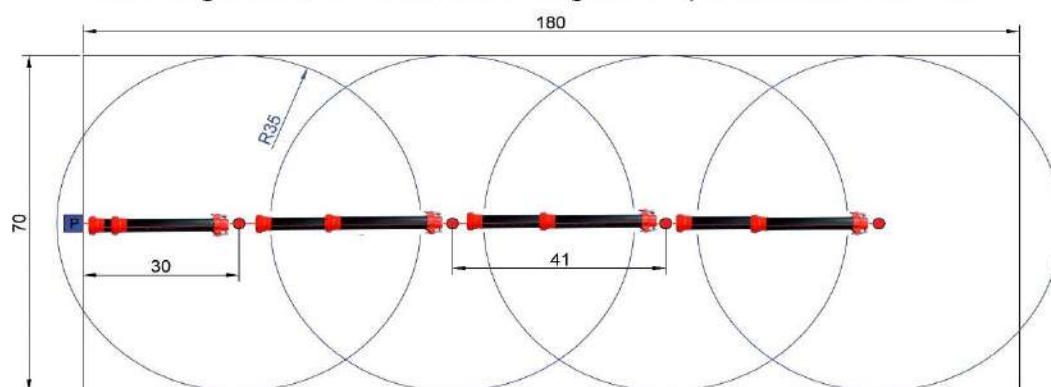

JET50 (20mm Nozzle) X 4 Sprinkler - DCR125 Tractor PTO Pump
Total Irrigated Area : 12.500m² - Irrigation Pipe Diameter : 110mm

Sprinkler Irrigation Kit For 12.500m ² - KIT4	
Description Of the Goods	QTY. Piece
JET50 Sprinkler	4
110mm Elbow	2
suction hose 5" 8mt with suction valve	1
110X75 TE	5
4 POD Connection Stant With QC	4
110mm Gasket	80
110mm HDPE Pipe 5.8meter (Total Lenght 5.8m X 52 = 300 Meter)	52
Blind Plug 110mm	2
Bling Plug 75mm	1
DCR125 Tractor Pump - PTO Operated	1

